

- Complies with American National Standard Z358.1-2009
- Galvanized Steel Protected with BradTect® Safety Yellow Coating or All Stainless Steel (S19-110SS)
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Patent Pending



Specifications

Designed for locations where wall-mounted showers are impractical. These units provide a deluge of water when the operating handle is pulled. Shower provides a superior washdown with a more even spray pattern.

cUPC Approved:

S19-110 and S19-110SS are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).




This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.

Standard Equipment

SpinTec™ Showerhead

Standard showerhead is 3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic (Model S19-110). High performance corrosion-resistant stainless steel showerhead measures 2" (51mm) in diameter (Model S19-110SS). SpinTec drench showerhead features integral 26 GPM flow control, conserving water and helping to accurately size your tepid water system.

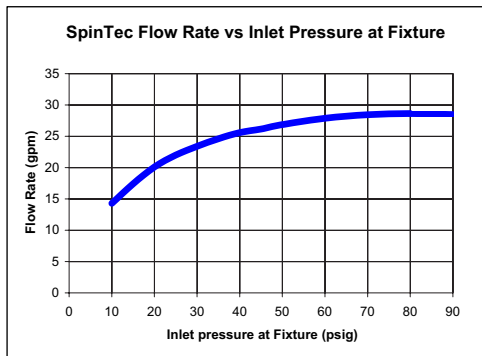

Valve

Chrome-plated brass 1" NPT stay-open ball valve, operated by stainless steel pull rod with triangular handle. Model S19-110SS is all stainless steel.


Pipe and Fittings

1/4" galvanized steel with BradTect® safety yellow coating. S19-110SS is all stainless steel.

Water Supply

1/4" NPT.

| Model | Description |
|------------------------------------|---|
| <input type="checkbox"/> S19-110 | Freestanding Drench Shower |
| <input type="checkbox"/> S19-110SS | Freestanding Drench Shower - All Stainless Steel |
| <input type="checkbox"/> S19-2100 | Navigator EFX25 - Emergency Thermostatic Mixing Valve |

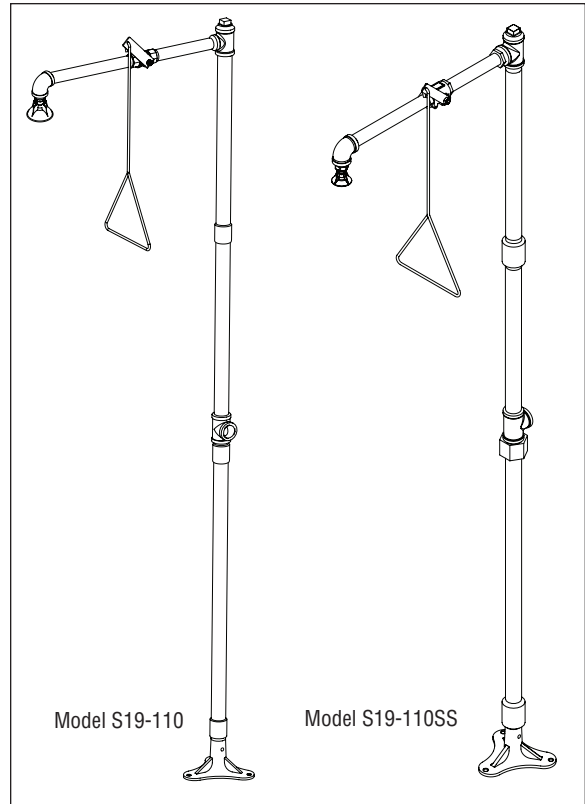



Recommended Option:

Navigator S19-2100 EFX25
Emergency Thermostatic Mixing Valve

NAVIGATOR



Satisfies ANSI Z358.1-2009
tepid water requirements.

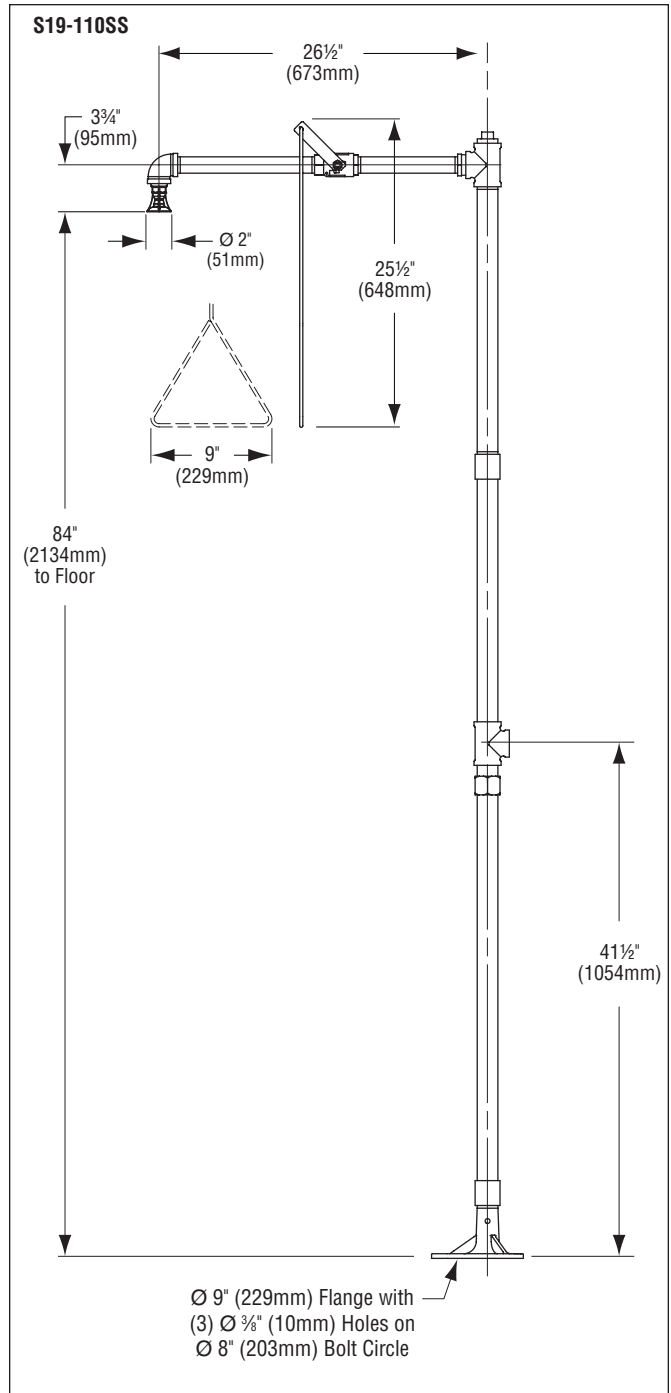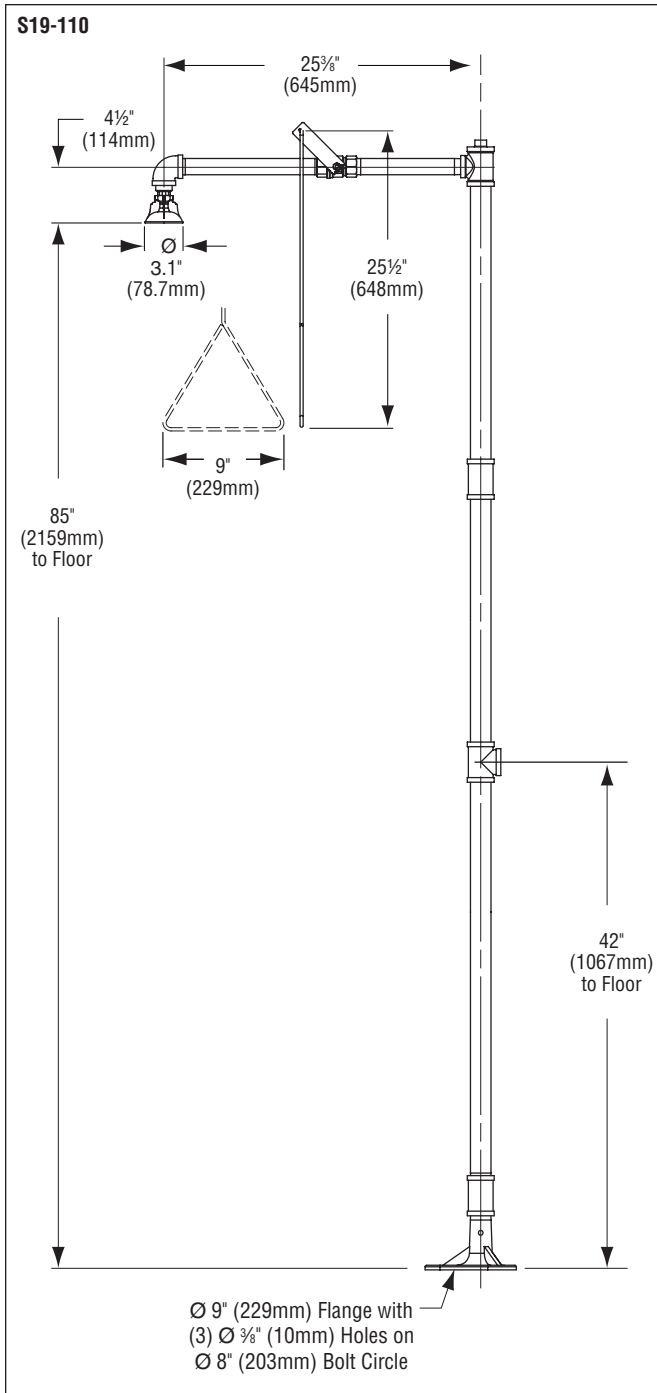

All dimensions assume standard thread engagement. Variations in manufacturing allow for +/- 1/8" (3mm) per threaded joint. To find the tolerance of a dimension, add the number of thread joints in between a dimension and multiply it by 1/8" (3mm).