

- Complies with American National Standard Z358.1-2009
- Galvanized Steel Protected with BradTect® Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Patent Pending

Specifications


Designed for areas subject to freezing. Drench shower fits easily into any work environment. Shower valve operates quickly by a large, highly visible push handle. Shower provides a superior washdown with a more even spray pattern.

This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.

Standard Equipment

SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic for high visibility in emergency situations. SpinTec drench showerhead features integral 26 GPM flow control, conserving water and helping to accurately size your tepid water system.

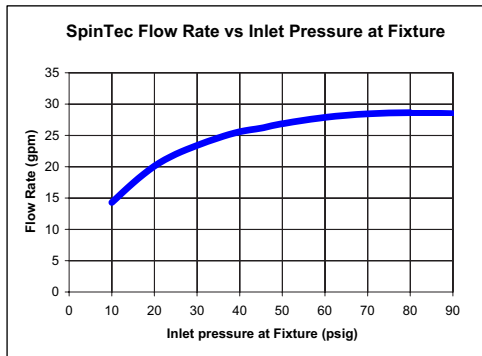

Frost-Proof Valve

1" stay-open valve. Hand operated by a stainless steel push handle. Standard depth 36" (914mm). Special order for other bury depths (18", 48", 60", 72").

Special order depths are non-returnable.


Pipe and Fittings

1/4" galvanized steel with BradTect® safety yellow coating.

Water Supply

1/4" NPT.

| Model | Description |
|-------------------------------------|---|
| <input type="checkbox"/> S19-110HFP | Frost-Proof Drench Shower |
| <input type="checkbox"/> S19-2100 | Navigator EFX25 - Emergency Thermostatic Mixing Valve |

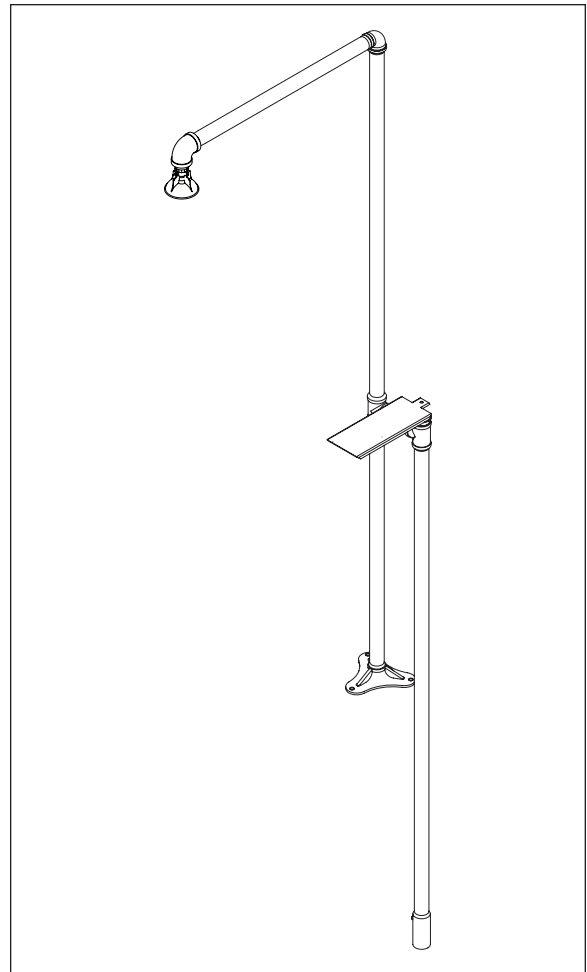


Recommended Option:

Navigator S19-2100 EFX25
Emergency Thermostatic Mixing Valve

NAVIGATOR



Satisfies ANSI Z358.1-2009
tepid water requirements.

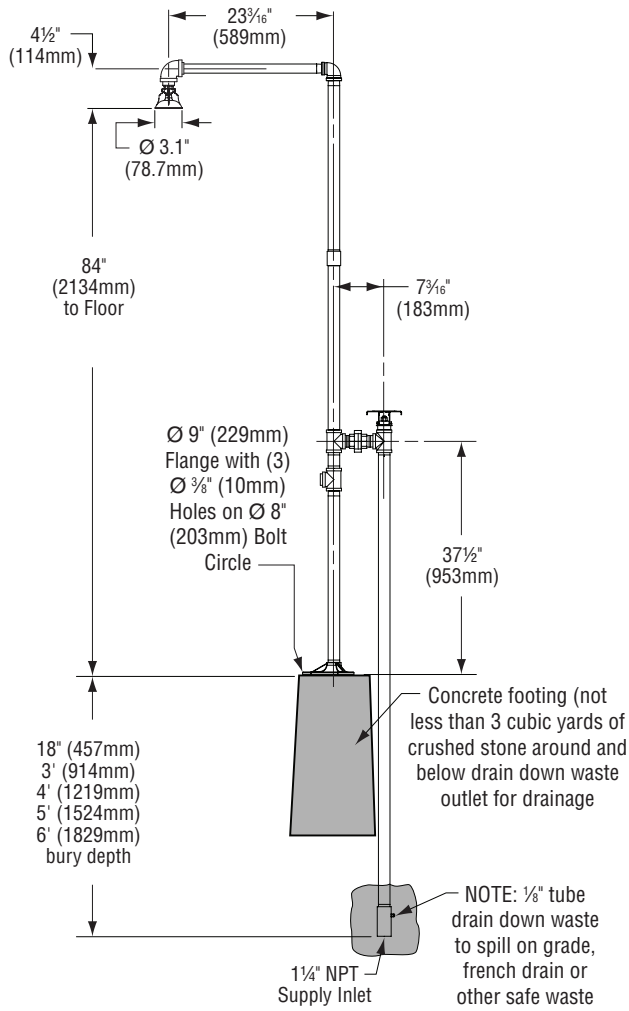

All dimensions assume standard thread engagement. Variations in manufacturing allow for +/- 1/8" (3mm) per threaded joint. To find the tolerance of a dimension, add the number of thread joints in between a dimension and multiply it by 1/8" (3mm).