

Flush-Mounted Drench Shower w/ Horizontal Supply (Barrier-Free)

Model S19-120FMBF

- Complies with American National Standard Z358.1-2004
- Galvanized Steel Protected with BRADTECT™ Safety Yellow Coating
- Flush-Mounted with Concealed Pipe and Fittings
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty

Specifications

Barrier-Free design makes this drench shower unit fully accessible to people with physical disabilities. Bradley meets accessible codes by assuring proper placement of shower heads and extended pull rods. Unit saves space and fits easily into any work environment. Shower valve operates quickly by an extended pull rod with a triangular handle.

UPC and cUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

Construction

Integral flange mounts flush with finished ceiling. Shower head and extended shower pull rod are stainless steel. Galvanized steel piping is additionally protected with BRADTECT™ safety yellow coating.

Standard Equipment

Shower Head

12-7/8" (254mm) diameter stainless steel.

Valve

Chrome-plated brass 1" IPS stay-open ball valve. Operated by stainless steel pull rod with triangular handle.

Pipe and Fittings

Concealed, galvanized steel protected with RADTECT™ safety yellow coating.

Water Supply


1" IPS horizontal.



Recommended Option:

Navigator S19-2100 EFX25
Emergency Thermostatic Mixing Valve

NAVIGATOR



Satisfies ANSI Z358.1-2004
tepid water requirements.




SEI CERTIFIED
MODEL
Z358.1-2004

Flush-Mounted Drench Shower w/ Horizontal Supply (Barrier-Free)

Model S19-120FMBF

MODEL	
Model No.	Description
<input type="checkbox"/> S19-120FMBF	Flush-Mounted Drench Shower w/ Horizontal Supply (Barrier-Free)
<input type="checkbox"/> S19-2100	Navigator EFX25 – Emergency Thermostatic Mixing Valve

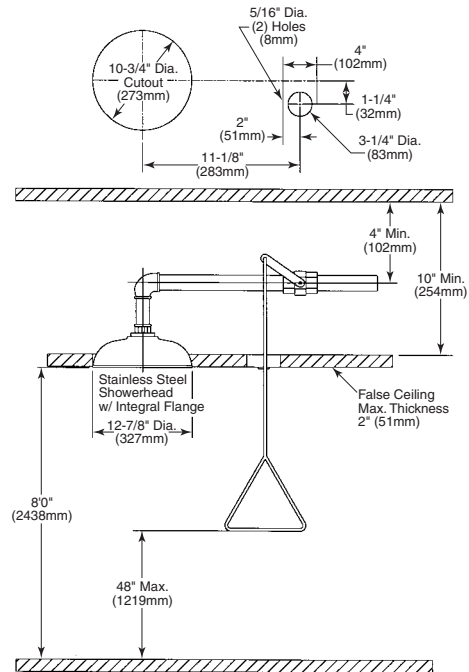

Important Note:

Drench shower is designed to accommodate standard 8' ceiling height - other ceiling heights must be specified and special ordered.

Document No. 4055

This information is subject to change without formal notice.
© 2006 Bradley Corporation
10-11-2006 (2 Pages Total)

EF4055.2



P.O. Box 309, Menomonee Falls, WI 53052-0309
Phone 1-800-BRADLEY FAX 262-251-5817
Web Site: <http://www.bradleycorp.com>