


- Complies with American National Standard Z358.1-2009
- Galvanized Steel Protected with BradTect® Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Patent Pending

### Specifications

This unit is made specifically for areas subject to freezing. Compact drench shower fits easily into any work environment. Shower valve operates quickly by a stainless steel push flag handle. Shower provides a superior washdown with a more even spray pattern.

 *This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.*


Model	Description
<input type="checkbox"/> S19-120HFP	Frost-Proof Wall-Mounted Drench Shower
<input type="checkbox"/> S19-2100	Navigator EFX25 - Emergency Thermostatic Mixing Valve

**Recommended Option:**  
Navigator S19-2100 EFX25  
Emergency Thermostatic Mixing Valve

**NAVIGATOR**




Satisfies ANSI Z358.1-2009  
tepid water requirements.

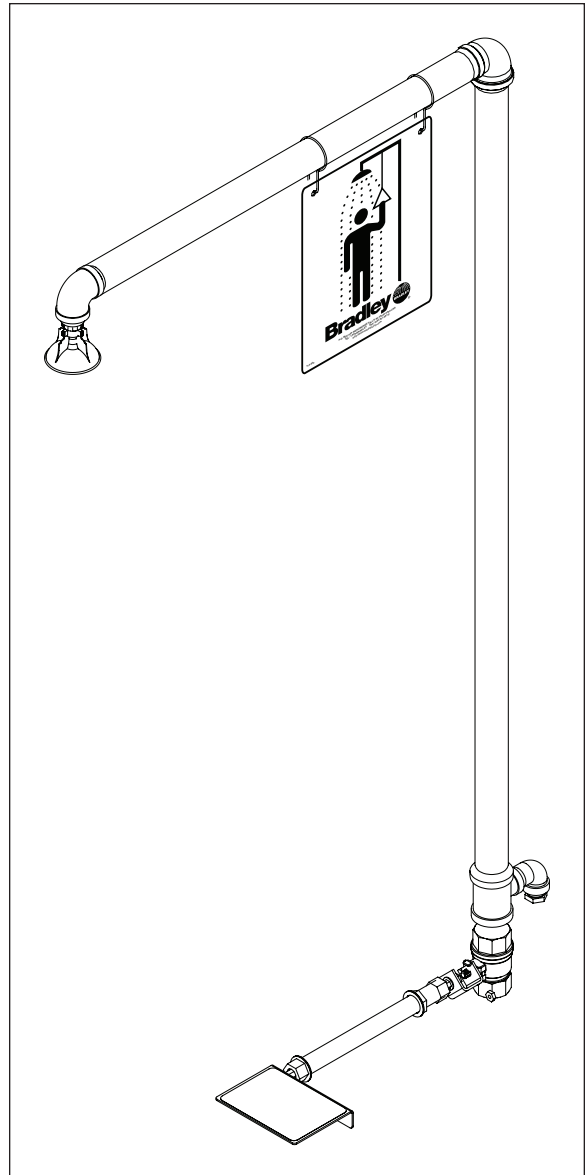

### Standard Equipment

#### SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic for high visibility in emergency situations. SpinTec drench showerhead features integral 26 GPM flow control, conserving water and helping to accurately size your tepid water system.

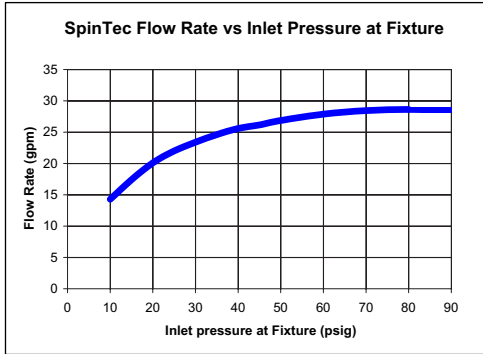

#### Frost-Proof Shower Valve

Chrome-plated brass 1" NPT stay-open valve. Hand operated by a stainless steel push handle. Standard depth 36" (914mm). Special order for other bury depths (18", 48", 60", 72").



Special order depths are non-returnable.

#### Pipe and Fittings

1 1/4" galvanized steel with BradTect® safety yellow coating. Standard wall thickness is 8"-12". Special order for other wall thicknesses. (0"-8" or 12"-18").

#### Water Supply

1 1/4" NPT.

