

- Complies with American National Standard Z358.1-2009
- Easily Mounts to Wall
- Galvanized Steel Protected with BradTect® Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Patent Pending



## Specifications


Impact-resistant plastic showerhead is colored bright yellow for high visibility in emergency situations. Shower provides a superior washdown with a more even spray pattern. Shower pull rod is stainless steel. Galvanized steel piping is additionally protected with BradTect® safety yellow coating. Hand-held hose sprayhead contains an antimicrobial agent to protect the sprayhead.

- Installer to supply backflow prevention as required by UPC, IPC and/or local plumbing coded. Contact Bradley or visit [bradleycorp.com](http://bradleycorp.com) for available options.*
- Drench shower is designed to accommodate standard 8' ceiling height. ANSI Z358.1 compliant drench showers are mounted between 82"-96" from the lower edge of the showerhead or shroud to the floor.*

### cUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

- This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.*

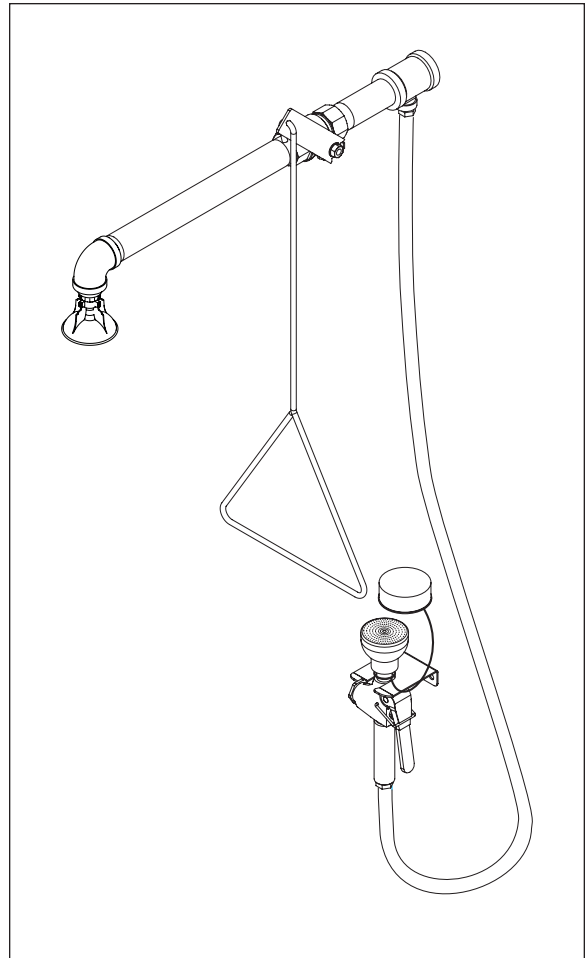

Model	Description
<input type="checkbox"/> S19-120P	Drench Shower w/Hose Spray and Horizontal Supply
<input type="checkbox"/> S19-2100	Navigator EFX25 - Emergency Thermostatic Mixing Valve

**Recommended Option:**  
 Navigator S19-2100 EFX25  
 Emergency Thermostatic Mixing Valve




**NAVIGATOR**

Satisfies ANSI Z358.1-2009  
 tepid water requirements.

## Standard Equipment

### SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic for high visibility in emergency situations. SpinTec drench showerhead features integral 26 GPM flow control, conserving water and helping to accurately size your tepid water system.

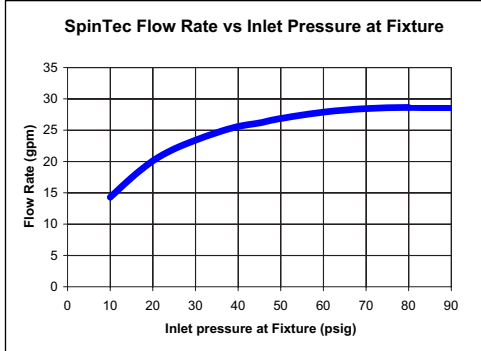

### Valve

Chrome-plated brass 1" NPT stay-open valve. Operated by a stainless steel pull rod with triangular handle.

### 8' Hand-Held Hose Spray

The hose spray attachment acts as a face and/or body rinser. Valve remains open once handle is squeezed. Hose is 8' yellow reinforced thermoplastic with 450 PSI burst strength.

### Pipe and Fittings

Galvanized steel with BradTect® safety yellow coating.

### Water Supply

1" NPT Horizontal.

