

Laboratory Application “Swing” Eye Wash Fixture

Model S19-270B (Shown) Model S19-270BL

- Complies with American National Standard Z358.1-2004
- Right and Left Hand Mount Options
- Chrome-Plated Brass Pipe and Fittings
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty

Specifications

Unit design saves space and fits easily into any work environment. Eye wash operates quickly by a large, highly visible push handle. Safe, steady water flow under varying water supply conditions from 30-90 PSI is assured by integral flow control in the sprayhead assembly.

UPC and cUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

Construction

Pipe and fittings are chrome-plated brass. Includes right or left hand mount options.

Standard Equipment

Standard Sprayhead Assembly

Chrome-plated brass sprayhead assembly with twin, soft flow, eye wash heads and protective sprayhead covers. The integral flow control assures safe, steady flow under varying water supply conditions from 30-90 PSI.

Valve



Chrome-plated brass 1/2" IPS stay-open ball valve. Hand operated by a large, highly visible stainless steel push handle.

Pipe and Fittings

Chrome-plated brass.

Water Supply

1/2" IPS.

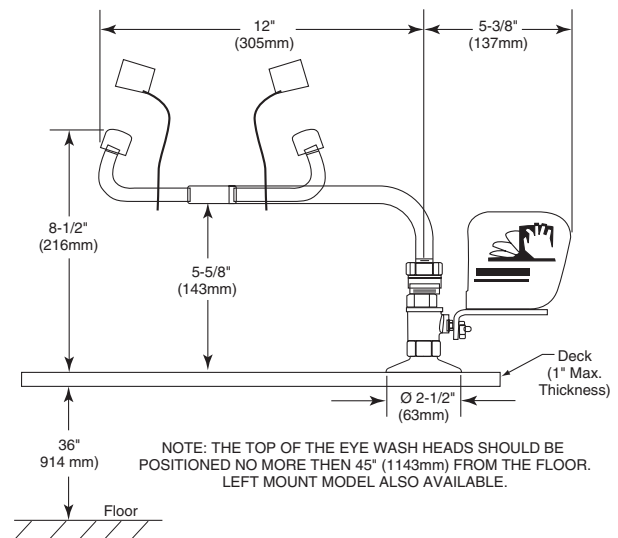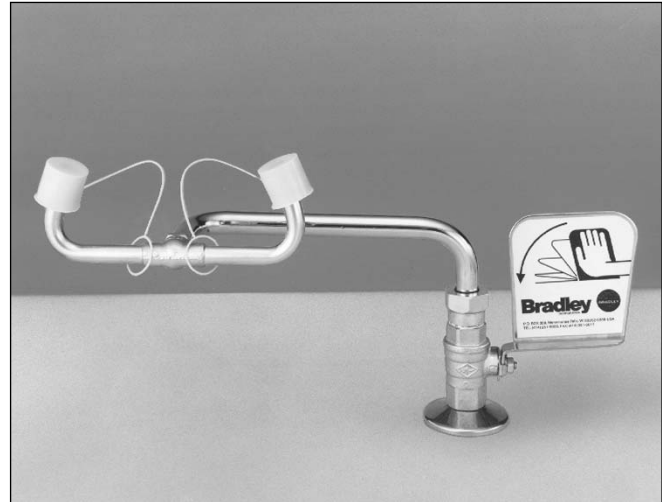

MODEL	
Model No.	Description
<input type="checkbox"/> S19-270B	Laboratory Application “Swing” Eye Wash Fixture-Right Hand Mount
<input type="checkbox"/> S19-270BL	Laboratory Application “Swing” Eye Wash Fixture-Left Hand Mount

Document No. 4470

This information is subject to change without formal notice.
© 2007 Bradley Corporation
1-15-2007 (1 Page Total)



P.O. Box 309, Menomonee Falls, WI 53052-0309
Phone 1-800-BRADLEY FAX 262-251-5817
Web Site: <http://www.bradleycorp.com>