

- Complies with American National Standard Z358.1-2009
- Concealed Unit
- Activates with Opening of Stainless Steel Door
- Water Collects Back Into the Cabinet's Internal Drain
- Chrome-Plated Brass Pipe and Fittings
- Universal Sign and Inspection Tag Included
- Designed to Mount Between Standard 16" Wall Studs
- Antimicrobial Protection



### Specifications

Unit design saves space and fits easily into any work environment. Stainless steel cabinet and door conceal eye/face wash with a consistent and appealing exterior appearance, suitable to any application. Especially ideal for areas where space is limited or where a floor drain is not available. Eye/face wash activates by pulling the cabinet door down. A gas spring softens the action of opening the unit allowing the door to descend in a smooth and controlled manner. Water is collected by the door assembly and directed back into the wall for drainage. Eye/face wash has an integral flow control in the shank. Unit is flush-mounted in the wall. An optional bottom-fed thermostatic mixing valve (S19-2000) can be installed inside the maintenance compartment of the S19-292 or the S19-292PT. The S19-2000 can be easily accessed through the maintenance door below the fixture. Includes antimicrobial protection.

#### Rough-Ins:

S19-292 and S19-292PT require a rough wall opening of 14½"W x 32¼"H x 6"D.

#### cUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).



*This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.*

### Standard Equipment

#### Eye/Face Wash Sprayhead Assembly

Twin perforated-disc eye/face wash heads with protective sprayhead covers. Gentle spray bathes eyes and face. Contains an antimicrobial agent to protect eye/face wash unit.

#### Cabinet

Corrosion resistant stainless steel cabinet and doors. Top section of the door conceals the eye/face wash unit which is activated with a plastic molded wide grip handle. Bottom of cabinet conceals tailpiece and fittings, and is provided with a locking device to prevent tampering with the unit. Open back and side panels in the bottom section of cabinet to accommodate multiple waste options.

#### Valve

Chrome-plated brass ½" NPT stay-open valve. Water flow is activated by pulling swing arm down 90°. Water will continue to flow until arm is returned to original position.

#### Pipe and Fittings


Chrome-plated brass.

#### Water Supply

½" NPT.

#### Waste


1¼" drain provided with tailpiece. P-trap waste option also available (s19-292PT).

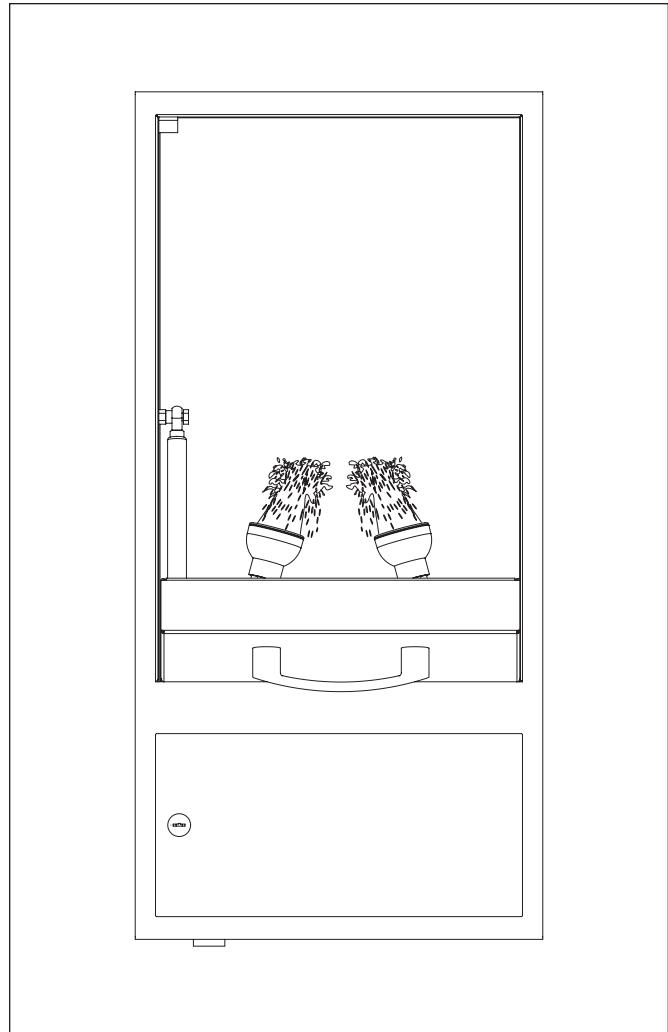

### Recommended Option:

Navigator S19-2000 EFX8  
Emergency Thermostatic Mixing Valve

**NAVIGATOR**



Satisfies ANSI Z358.1-2009 tepid water requirements.

### Model

### Description

<input type="checkbox"/> <b>S19-292</b>	Barrier-Free Cabinet-Concealed Swing-Down Eye/Face Wash Unit
<input type="checkbox"/> <b>S19-292PT</b>	Barrier-Free Cabinet-Concealed Swing-Down Eye/Face Wash Unit with P-trap
<input type="checkbox"/> <b>S19-2000</b>	Navigator EFX8 - Emergency Thermostatic Mixing Valve

S19-292 and S19-292PT