

- Complies with American National Standard Z358.1-2009
- Corrosion-Resistant PVC Construction with All-Stainless Steel Valve Fittings
- Combination Units may be Top-Supplied or Mid-Supplied
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Patent Pending



Specifications

Combination Drench Shower and Eye/Face Wash Unit saves space and is durable for highly corrosive work environments. Shower valve operates quickly by a pull rod with a triangular handle. Shower provides a superior washdown with a more even spray pattern. Eye/face wash is operated by a highly visible push handle. Safe, steady water flow under varying water supply conditions from 30–90 PSI is assured by integral flow control in the sprayhead assembly. NOTE: The ANSI Z358.1 standard requires an uninterrupted supply of flushing fluid at a minimum 30 PSI flowing pressure. Eye/face wash sprayheads contain an antimicrobial agent to protect the sprayheads.


cUPC Approved:

S19-310PVC is certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).



This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.

Model	Description
<input type="checkbox"/> S19-310PVC	Combination Drench Shower and Eye/Face Wash Unit
<input type="checkbox"/> S45-620	Optional Foot Treadle Kit for Hand or Foot Operation (sold separately)
<input type="checkbox"/> S19-2100	Navigator EFX25 - Emergency Thermostatic Mixing Valve

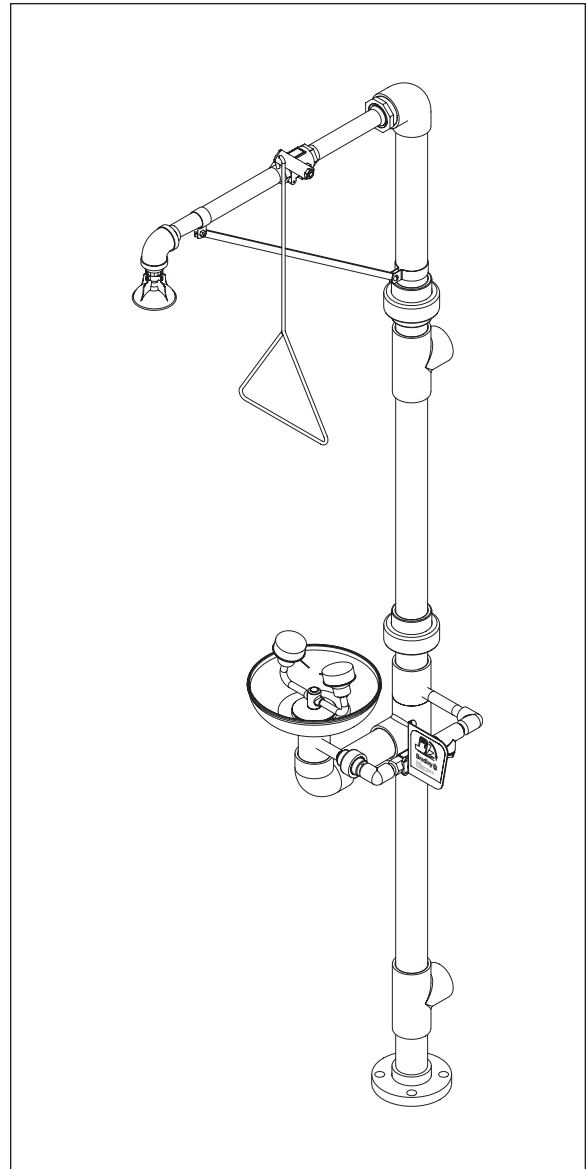

Recommended Option:

Navigator S19-2100 EFX25
Emergency Thermostatic Mixing Valve

NAVIGATOR




Satisfies ANSI Z358.1-2009
tepid water requirements.

Standard Equipment

SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic. SpinTec drench showerhead features integral 26 GPM flow control, conserving water and helping to accurately size your tepid water system.

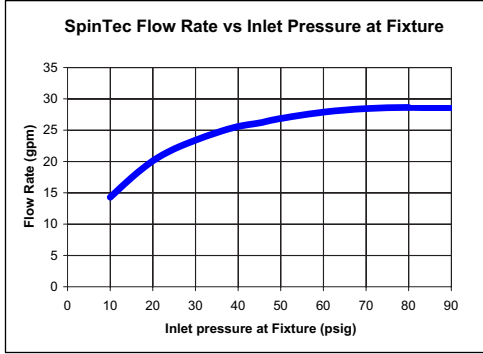

Shower Valve

Stainless Steel 1" NPT stay-open ball valve. Operated by a stainless steel pull rod with triangular handle.

Eyewash Bowl

10" (254mm) diameter yellow impact-resistant plastic.

Eyewash Sprayhead Assembly

Twin perforated-disc eye/face wash heads with protective pop-off sprayhead covers. Safe, steady water flow under varying water supply conditions from 30–90 PSI is assured by integral flow control in the sprayhead assembly.

Eyewash Valve

Stainless Steel 1/2" NPT stay-open valve. Hand operated by a large, highly visible safety yellow PVC push handle.

Pipe and Fittings


Heavy wall 2" schedule 80, corrosion-resistant PVC piping with 2" socket-welded supply joint. The base is a 6" diameter floor flange.

Water Supply

2" NPT.



Local codes may require the installation of a backflow prevention valve to complete proper installation. Compliance with local codes is the responsibility of the installer. Valve must be tested annually to verify that it is functioning properly. Backflow prevention valves are not included with the fixture and may be supplied by the contractor or purchased from Bradley Corporation.

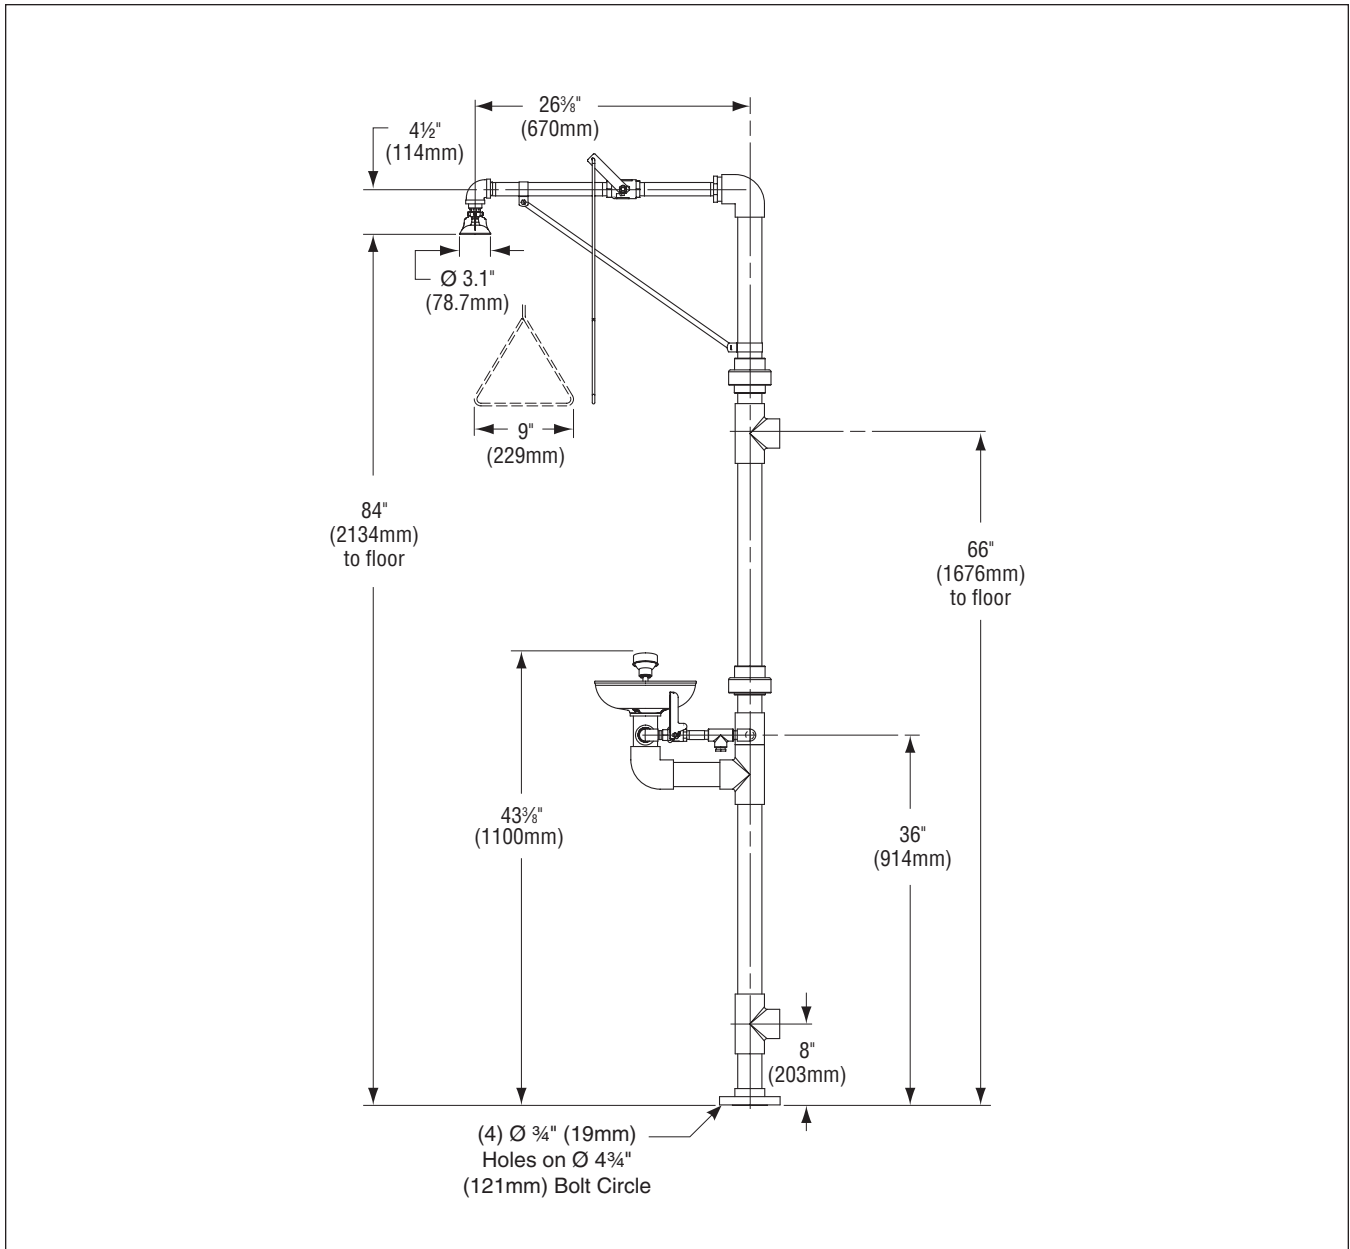

All dimensions assume standard thread engagement. Variations in manufacturing allow for $\pm \frac{1}{8}"$ (3mm) per threaded joint. To find the tolerance of a dimension, add the number of thread joints in between a dimension and multiply it by $\frac{1}{8}"$ (3mm).