

This style is mounted to the floor with floor bolts and is recommended for areas where there are unusually high ceilings or conditions where aesthetically this style is desired. It requires a minimum 3" concrete floor for anchoring.

### Construction

Consists of 0.048 high pressure decorative laminate which meets or exceeds NEMA standards, bonded under pressure with a non-toxic adhesive to a solid 45 lb. density industrial grade particle board core.

### Panels

Panels are 1" thick construction.

### Doors

Doors are 1" thick construction.

### Pilasters

Pilasters are 1¼" thick construction. The floor edge of the pilaster shall be provided with a mechanically fastened ¾" steel leveling bar. Pilasters are attached to the floor using a lead anchor, ¾" threaded rod, hex nuts and washers to provide vertical and horizontal adjustment.

### Hardware

Mills standard hardware is constructed from heavy-duty grade chromed Zamac. Compartments are provided with all hardware and zinc-plated Torx-head fasteners to complete installation for applications with concrete floors and masonry block walls.

### Door Hardware


Wraparound hinges are thru-bolted to the pilasters. Surface mounted slide latch with emergency egress requires no twisting motion and complies with all Federal ADA guidelines. Strike/keeper is thru-bolted. Doors 32" wide or less are provided with a combination coat hook/bumper. Doors 34" wide or 36" wide are provided with an individual coat hook, door bumper and door pull. Theft-resistant fasteners are supplied with all hardware.

### Brackets

Stirrup-type, single-ear, double-ear and U-brackets are provided with appropriate fasteners.

### Shoes

4-piece shoes are 4" high, 300 Series stainless steel with #4 satin brushed finish and are secured to the edge of the pilaster with Torx-head fasteners.

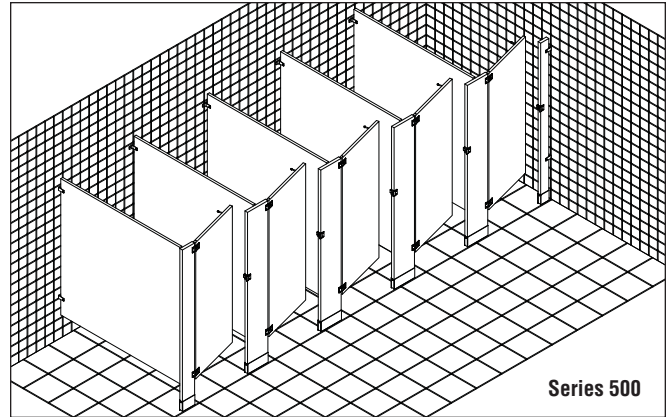

### Options

#### Colors

- |  |   |   |
|--|---|---|
| <input type="checkbox"/> Black           | <input type="checkbox"/> Gray Glacé     | <input type="checkbox"/> Sunstone         |
| <input type="checkbox"/> Burnished Ember | <input type="checkbox"/> Lichen         | <input type="checkbox"/> Tuscan Olive     |
| <input type="checkbox"/> Dove Gray       | <input type="checkbox"/> Mystique Dawn  | <input type="checkbox"/> Wild Cherry      |
| <input type="checkbox"/> Evening Tigris  | <input type="checkbox"/> Natural Almond | <input type="checkbox"/> Windsor Mahogany |
| <input type="checkbox"/> Frosty White    | <input type="checkbox"/> Navy Legacy    | <input type="checkbox"/> Windswept Bronze |
| <input type="checkbox"/> Fusion Maple    | <input type="checkbox"/> Neutral Glacé  |   |
| <input type="checkbox"/> Graphite Nebula | <input type="checkbox"/> Pebble         |   |

#### Hinges

- Chromed Zamac Wraparound Gravity Hinge (STD)
- Stainless Steel Wraparound Gravity Hinge
- Continuous Aluminum Spring-Loaded Hinge
- Continuous Stainless Steel Spring-Loaded Hinge

#### Door Hardware

- Chromed Zamac Surface-Mounted Slide Latch and Keeper (STD)
- Stainless Steel Surface-Mounted Slide Latch and Keeper

#### Brackets

- Chromed Zamac Stirrup Brackets (STD)
- Stainless Steel Stirrup Brackets
- Continuous Aluminum Brackets
- Continuous Stainless Steel Brackets

#### Miscellaneous

- Cutouts
- Steel Reinforced Pilasters

Verify all rough-in dimensions prior to installation.

Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.