

This style is mounted to the ceiling and is recommended where complete floor access is desired. This system requires pre-installed structural ceiling support and is not recommended for ceiling heights over 8'.

### Construction

Consists of 0.048 high pressure decorative laminate which meets or exceeds NEMA standards, bonded under pressure with a non-toxic adhesive to a solid 45 lb. density industrial-grade particle board core.

### Panels

Panels are 1" thick construction.

### Doors

Doors are 1" thick construction.

### Pilasters

Pilasters are 1¼" thick construction. The floor edge of the pilaster shall be provided with a mechanically fastened ¾" steel leveling bar. Pilasters are attached to the floor using a lead anchor, ¾" threaded rod, hex nuts and washers to provide vertical and horizontal adjustment.

### Hardware

Mills standard hardware is constructed from heavy-duty grade chromed Zamac. Compartments are provided with all hardware and zinc-plated Torx-head fasteners to complete installation for applications with concrete floors and masonry block walls.

### Door Hardware


Wraparound hinges are thru-bolted to the pilasters. Surface-mounted slide latch with emergency egress requires no twisting motion and complies with all Federal ADA guidelines. Strike/keeper is thru-bolted. Doors 32" wide or less are provided with a combination coat hook/bumper. Doors 34" wide or 36" wide are provided with an individual coat hook, door bumper and door pull. Theft-resistant fasteners are supplied with all hardware.

### Brackets

Stirrup-type, single-ear, double-ear and U-brackets are provided with appropriate fasteners.

### Sleeves

4-piece sleeves are 4" high, 300 Series stainless steel with #4 satin brushed finish and are secured to the edge of the pilaster with Torx-head fasteners.

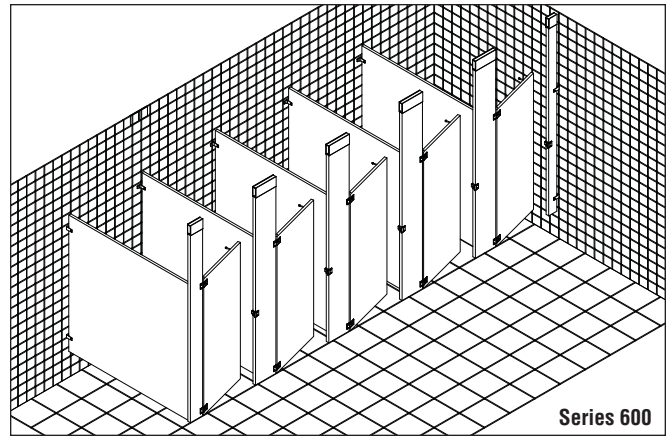

Series 600

### Options

#### Colors

- |  |   |   |
|--|---|---|
| <input type="checkbox"/> Black           | <input type="checkbox"/> Gray Glacé     | <input type="checkbox"/> Sunstone         |
| <input type="checkbox"/> Burnished Ember | <input type="checkbox"/> Lichen         | <input type="checkbox"/> Tuscan Olive     |
| <input type="checkbox"/> Dove Gray       | <input type="checkbox"/> Mystique Dawn  | <input type="checkbox"/> Wild Cherry      |
| <input type="checkbox"/> Evening Tigris  | <input type="checkbox"/> Natural Almond | <input type="checkbox"/> Windsor Mahogany |
| <input type="checkbox"/> Frosty White    | <input type="checkbox"/> Navy Legacy    | <input type="checkbox"/> Windswept Bronze |
| <input type="checkbox"/> Fusion Maple    | <input type="checkbox"/> Neutral Glacé  |   |
| <input type="checkbox"/> Graphite Nebula | <input type="checkbox"/> Pebble         |   |

#### Hinges

- Chromed Zamac Wraparound Gravity Hinge (STD)
- Stainless Steel Wraparound Gravity Hinge
- Continuous Aluminum Spring-Loaded Hinge
- Continuous Stainless Steel Spring-Loaded Hinge

#### Door Hardware

- Chromed Zamac Surface-Mounted Slide Latch and Keeper (STD)
- Stainless Steel Surface-Mounted Slide Latch and Keeper

#### Brackets

- Chromed Zamac Stirrup Brackets (STD)
- Stainless Steel Stirrup Brackets
- Continuous Aluminum Brackets
- Continuous Stainless Steel Brackets

#### Miscellaneous

- Cutouts
- Steel Reinforced Pilasters

Verify all rough-in dimensions prior to installation.

Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.