

Aerada™ 90-80 Series Wristblade Faucet

Model S53-303

- ADA Compliant Wristblade Handles
- 4" Integral Spout
- Chrome Plated Finish
- Vandal Resistant Construction
- Quarter-Turn Operating Handles

Specifications

User Operation

The ADA compliant wristblade will turn 1/4 of a turn to fully activate the flow of water without requiring gripping or twisting of the handle. The faucet will shut off when the wristblade handle is returned to its original position. Activation will require less than five pounds of pressure.

Standard Equipment

Materials

Chrome-plated, solid brass cast body.

Mounting

4" centerset mounting.

Flow Control/Rate

Operating range 20-100 PSI. Flow restrictor keeps flow constant at .5 GPM.

Vandal Resistant

The 90-80 Series Wristblade is mounted on lavatory decks with standard brass studs. The solid brass cast body provides years of reliable vandal resistance. A .5 GPM vandal resistant aerator comes standard with each faucet. The wristblade handles come with a standard vandal resistant screw.

Code Compliance and Certifications

CSA

The 90-80 Series Wristblade faucet is certified to meet CSA B125 test standards for plumbing fittings. The faucets are CSA approved in Canada and the United States.

ASME A112.18.1

The 90-80 Series Wristblade faucet is certified to meet the ASME A112.18.1 standard, which addresses plumbing fixture fittings.

ADA Compliance

The design of the wristblade handles does not require gripping or twisting in order to activate the faucet. The faucet requires less than five pounds of force to operate, thereby meeting ADA guidelines provided by ANSI A117-1.



Sample Specification

ADA compliant wristblade faucet shall be (S53-303) Bradley Aerada 90-80 Series Wristblade faucet. Faucet shall be 4" centerset and shall include a .5 GPM vandal resistant aerator. The faucet body shall be made of chrome plated solid cast brass. The operating handles shall be compliant with ADA standards; no gripping or twisting is required to activate the faucet. The operating force to initiate flow will be 5 pounds or less, per ADA standards. Faucet shall be certified to CSA standards for both the United States and Canada.

MODELS – Faucet Only	
Part No.	Model/Description
<input type="checkbox"/> S53-303	Dual Wristblade, Low Profile 4" Centerset

OPTIONAL SELECTIONS	
Part No.	Model/Description
Drain Assembly:	
<input type="checkbox"/> 269-1231	D-ASSY Drain, Strainer, and Tailpiece



Document No. 3043

This information is subject to change without notice.
© 2004 Bradley Corporation
10-11-2004 (2 Pages Total)


FA3043.1



P.O. Box 309, Menomonee Falls, WI 53052-0309
Phone 1-800-BRADLEY FAX 262-251-5817
<http://www.bradleycorp.com>

Aerada™ 90-80 Series Wristblade Faucet Model S53-303

4" CENTERSET MOUNTING

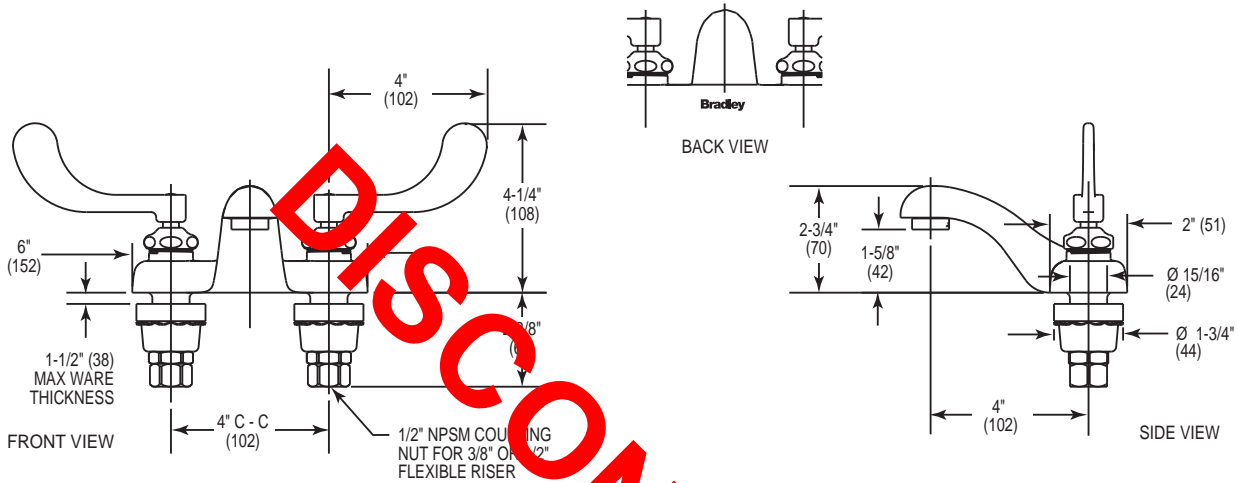

Notes:

Dimensions shown in parentheses are in millimeter