

Installation

Front-Mounted SX Panel Shower SXWS9557FM

Ligature Resistant Front-Mounted SX Panel Shower HSC95

Rough-in Dimensions	2
Installation	3
Caring for Stainless Steel	3

SXWS9557FM with "SX" severe service showerhead shown




IMPORTANT!



Read this entire installation manual to ensure proper installation. When finished with the installation, file this manual with the owner or maintenance department. Compliance and conformity to local codes and ordinances is the responsibility of the installer.



Separate parts from packaging and make sure all parts are accounted for before discarding packaging material. If any parts are missing, do not begin installation until you obtain the missing parts.



Make sure that all water supply lines have been flushed and then completely turned off before beginning installation. Debris in supply lines can cause valves to malfunction.




Product warranties may be found under "Products" on our web site at bradleycorp.com.



Dimensions



SXWS9557FM is shown. Rough-ins are the same for HSC95.

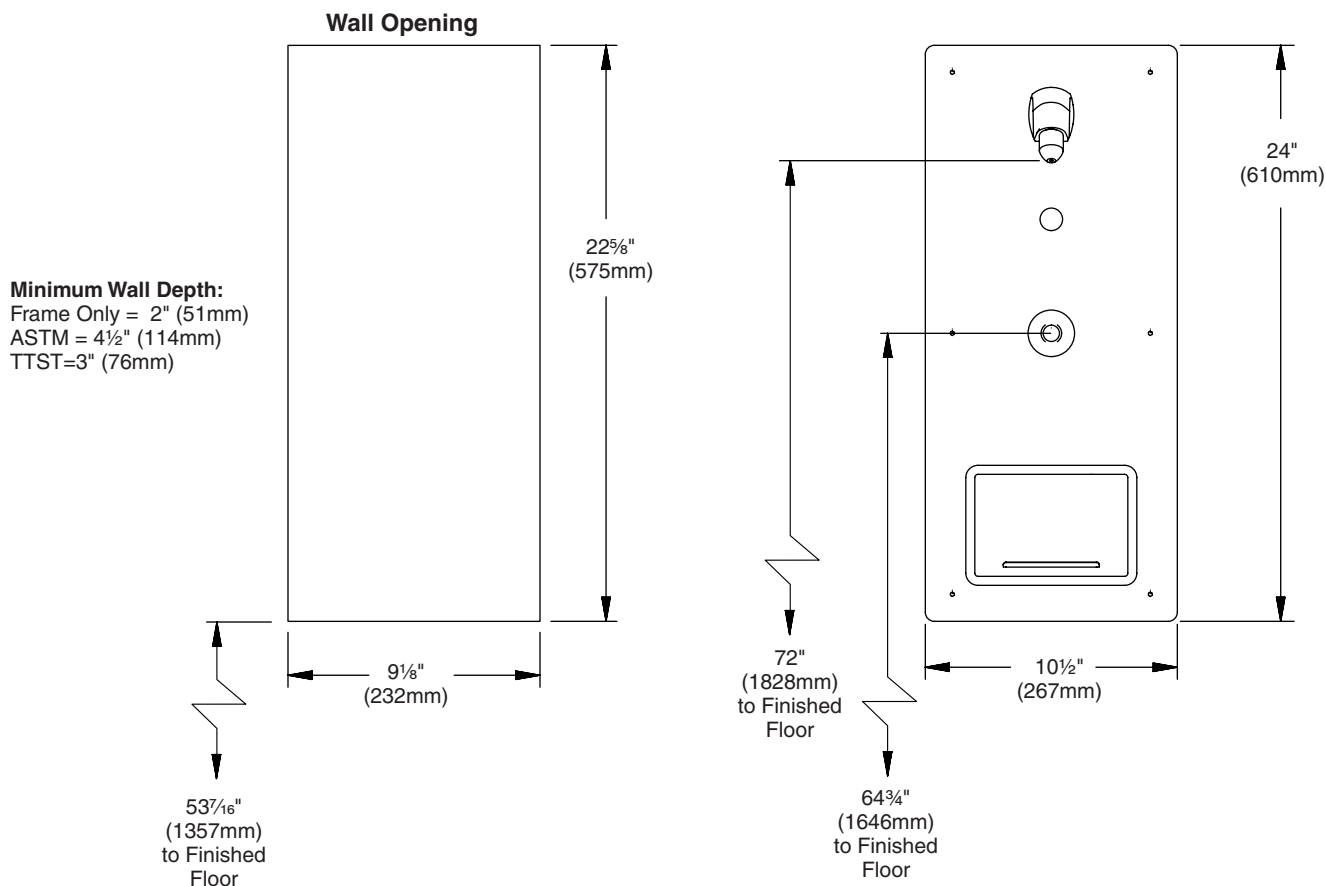

Installation

WARNING! After installation, all joints require security sealant by installer to eliminate gaps (if present) between wall and fixture.

A Using the hex key (taped to the soap tray), remove the six security screws from the shower panel and remove the frame from the panel.

D Install the valve assembly and make the valve connections to the showerhead and control button per the instructions included with the valve assembly.

E Reattach the panel to the frame with the six security screws.

B Install the frame into the wall opening per the instructions included with the frame.

C Install the control button per instructions included with the valve assembly. Apply 100% silicone caulk to escutcheon backside prior to installation to ensure a water tight seal. Wipe excess caulk from front side of escutcheon and panel.

F Ensure proper shower head adjustment and tightening of screws.

Minimum Wall Depth:
 Frame Only = 2" (51mm)
 ASTM = 4 1/2" (114mm)
 TTST=3" (76mm)

Cleaning and Maintenance for Stainless Steel

Material Description: Stainless steel is extremely durable, and maintenance is simple and inexpensive. Proper care, particularly under corrosive conditions, is essential. Always start with the simplest solution and work your way toward the more complicated.

Routine cleaning: Daily or as often as needed use a solution of warm water and soap, detergent, or ammonia. Apply the cleaning solution per the manufacturer's instructions and always use a soft cloth or sponge to avoid damaging the finish.

Stubborn Stains: To remove stains from stainless steel use a stainless steel cleaner and polish such as Ball® stainless steel cleaner or a soft abrasive. Always follow the manufacturer's instructions and apply in the same direction as the polish lines.



Never use ordinary steel wool or steel brushes on stainless steel. Always use stainless steel wool or stainless steel brushes.

Fingerprints and Smears: To remove fingerprints or smears use a high quality stainless steel cleaner and polish in accordance with the manufacturer's instructions. Many of these products leave a protective coating that helps prevent future smears and fingerprints.

Grease and Oil: To remove grease and oil use a quality commercial detergent or caustic cleaner. Apply in accordance to the manufacturer's instructions and in the direction of the polish lines.

Precautions: Avoid prolonged contact with chlorides (bleaches, salts), bromides (sanitizing agents), thiocyanates (pesticides, photography chemicals, and some foods), and iodides on stainless steel equipment, especially if acid conditions exist.



Do not permit salty solutions to evaporate and dry on stainless steel.

The appearance of rust streaks on stainless steel leads to the belief that the stainless steel is rusting. Look for the actual source of the rust in some iron or steel particles which may be touching, but not actually a part of the stainless steel structure.



Strongly acidic or caustic cleaners may attack the steel causing a reddish film to appear. The use of these cleaners should be avoided.

Brand Names

Use of brand names is intended only to indicate a type of cleaner. This does not constitute an endorsement, nor does the omission of any brand name cleaner imply inadequacy. Many products named are regional in distribution, and can be found in local supermarkets, department and hardware stores, or through your cleaning service. It is emphasized that all products should be used in strict accordance with package instructions.