

- Exposed Mounting
- Light-Duty Rod

### Product Materials

**FLANGES:** chrome plated steel.


**TUBING:** 1" O.D., 20 gauge chrome plated brass.

### Installation

Verify all rough-in dimensions prior to installation. To properly engage rod in support flanges, rod length must be no less than approximately 1/4" shorter than wall opening. Secure one flange to wall with mounting screws (included) at holes provided. Align mounting holes vertically. Slip opposite flange over rod and secure to opposite wall with rod in place.

### Guide Specification

Light-duty shower curtain rod shall be fabricated of 1" O.D., 20 gauge chrome plated brass with chrome plated steel flanges, length 5'.

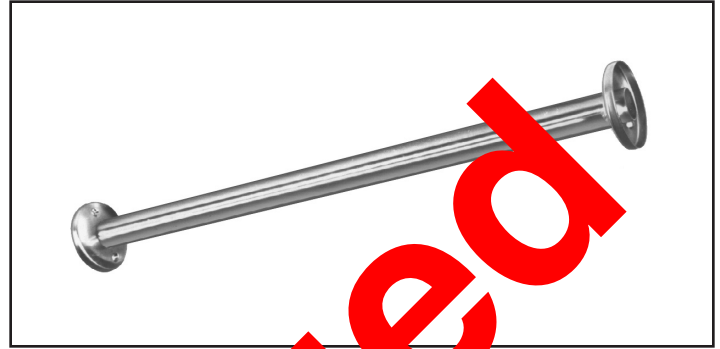

**Discontinued**

Washroom Accessories  
Document No. 8975

This information is subject to change without notice.

Always consult local and national codes for proper installation guidelines. Conformity and compliance to local and national codes is the responsibility of the installer.

4-1-2010

© 2010 Bradley Corporation  
P.O. Box 309, Menomonee Falls, WI 53052-0309  
Phone: 800.BRADLEY (800.272.3539) Fax: 262.253.4161  
bradleycorp.com