



# S19361HF - Pre-Assembled Freeze-Protected Safety Shower Heater Skid Tankless Water Heating Safety Solutions

- Pre-assembled, freeze-protected safety fixture and SNA heater skid system
- Bradley Heat Trace S19-304 with SpinTec™
- 54 - 144 kW (491,300 BTUs)
- Molded Duragrate® and integrated shower pan
- Temperature overshoot purge system
- NEMA 4 enclosure standard
- AL3 building communication alarm option included
- Dual Flow Heater Activation (Eye/Face Wash and/or Shower)
- Internal fusing (included) adds safety and permits single power connection
- Controller-locked temperature setting, output fixed at 80°F (27°C)
- Meets ANSI/ISEA Z358.1 standards
- Emergency stop button and door cutoff switch

## Standard Heater Equipment Tankless Water Heating Specifications

Keltech, Inc. SNA Safety Shower Heaters provide warm water intended to supply safety fixtures. The heaters uniquely perform in applications with low line pressure, while still accommodating ANSI standard flow rates. The durable components withstand higher pressures which result in longer service life, while ensuring the delivery of precise output temperature. Keltech's durable components withstand power abnormalities found in industrial environments and ensure tepid water standards are never exceeded (100°F) with its three-tier anti-scald protection and hot water purge. SNA-Series units are also suited to applications with 3 Phase Delta 480V or 600V, 50/60 Hz. The heat exchanger features o-ring seals that out last typical gasket construction. 1-1/4" NPT female inlet and outlet connections.

## Construction Skid

Skid includes freeze-protected skid with pre-piped assemblies, 1-1/4" inlet, pre-piped pressure and temperature relief valve and piping connecting the heater to the safety shower and eye/face wash combination unit. Skid is #10 gauge electro galvanized sheet steel frame, powder painted "safety yellow." Square molded Duragrate fiberglass (1" x 1-1/2" x 1-1/2") grating with grit top, covers the integrated shower pan.

## Temperature Controller

Keltech's PID Temperature Controller is more energy efficient and reliable than traditional microprocessors using staged elements. Power is infinitely variable, with no fixed inputs. The PID controller makes it possible to modulate the amount of power applied to the elements while also dispersing the required power evenly across all elements. This unique feature increases the product's life cycle.

## Heating Element

Each heater features a heavy duty, low watt density, Incoloy® 800 sheathed resistive element. The Keltech design ensures greater protection, durability and resistance to scaling from hard water because water is only heated when flowing; this means sediment will not collect in the heat exchanger.

## Solid State Relays

The liquid cooled solid state relays provide silent switching, which has a fast response and works in conjunction with the PID controller to infinitely modulate and add to the life of the heater.

## Electrical

The SNA-Series requires only one service feed per unit. Includes internal fusing as standard. Internal fusing provides superior protection so the incoming circuit can be higher than 48 amps (NEC). Keltech protects each heating element with fusing.

## Cabinet Enclosure

The skid-mounted cabinet enclosure is NEMA 4 rated and made from 14 gauge mild steel and powder coated with ANSI 61 gray, corrosion resistant paint. The optional NEMA 4X enclosures are corrosion resistant for harsher environments and made from 16 gauge 304 stainless steel. The NEMA 4X enclosure can also be specified with 316 stainless steel. Additional service access panel located on top of cabinet enclosure.



S19361HF

## Independent Safeties

Heater has three-tier anti-scald protection and TepiGuard™ hot water evacuation (overshoot purge protection). The controller alarm sends a signal to disconnect power to the elements if the temperature reaches 90°F (32°C). The internal thermostat with auto reset high limit switch ensures that when the temperature limit is reached, the unit will power down a bank of elements; when the temperature returns to the set point, power is restored. The surface mounted bi-metal thermostat with manual reset acts as a fail-safe and must be manually reset before power can be restored to the elements if the temperature limit is exceeded.

TepidGuard™ is an anti-scald feature, standard on all SNA-Series Safety Shower Heaters. This overshoot purge will automatically open and purge excess temperature water. This feature actively monitors temperature within the heater while operational. It also passively monitors water temperature while the heater is inactive. This is beneficial for outdoor installations where sun and weather can cause water temperature to exceed ANSI standards.

## Temperature Safety Values:

Internal thermostat with auto reset high limit switch: 95°F (35°C)  
Surface mounted bi-metal thermostat with manual reset: 100°F (38°C)  
Overshoot purge: 95°F (35°C)

## Dual Flow Activation

Keltech Safety Shower heaters have a dual flow activation. The low flow activation is used with eyewashes, eye/face washes, and drench hoses. The high flow activation is for safety shower usage. This allows just the right capacity of heated water to be used for each application. Heater operating range is 30 - 150 psi.

## Standard Safety Fixture Equipment

Bradley S19-304 Heat Trace Safety Shower mounted to skid provides a superior washdown with a more even spray pattern. Combination shower and eye/face wash unit is intended for use in areas where temperatures fall below freezing. Heat trace cable protects unit from freezing. Unit is encased in highly visible yellow ABS removable plastic shell. Shower valve operates quickly by a pull rod with a triangular handle and provides superior washdown. Halo eye/face wash is operated by a universal push handle.

## SpinTec Showerhead

Showerhead is 3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic. SpinTec drench shower's head features integral 22 GPM (83.3 L) flow control (exceeds minimum water flow of 20 GPM (75.7 L) at 30 psi (2.0 bar)), conserving water, allowing you to accurately size your S19361HF skid system.

## Bowl and Dust Cover

Bowl and dust cover are constructed of yellow impact-resistant plastic. Dust cover is transparent.

Protected by one or more of the following patents: 7,007,316 B2; 7,243,381 B2.

© 2017 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309  
800 BRADLEY (800 272 3539) +1 262 251 6000  
bradleycorp.com



# S19361HF - Pre-Assembled Freeze-Protected Safety Shower Heater Skid Tankless Water Heating Safety Solutions

## Eye/Face Wash

The Halo eye/face wash system offers a high performance rinsing platform that provides rapid relief to an individual's eyes and face that have been injured by chemicals or particulate. This system provides the most complete face wash available in the market. The eye/face wash includes an integral 5.1 GPM (19.2 LPM) flow control, providing water at a safe velocity while maintaining its effectiveness (exceeds minimum water flow of 3.0 GPM (11.4 LPM) at 30 PSI (2.0 bar)). Safe, steady water flow under varying water supply conditions from 30-90 PSI (2.0-6.1 bar) is assured by integral flow control in the sprayhead assembly. Sprayheads are made from an impact resistant ABS plastic.

Halo™ is covered by one or more of the following patents: 9,700,484; 9,314,398; D662220; D673298; D662605; D685920; D662219; and D671228. Other patents pending.

## Heater Product Options

### Fused Disconnect

Internal fused disconnect interlocks with enclosure door when energized, prohibiting access to a live cabinet. Select the FDS option for an additional level of safety and convenience at the heater location. Not available with SNA-723/600D.

### Alarm Selections

Keltech offers two levels of building communication alarm options. The AL3 option comes standard on the S19361F and provides dry contacts that open to signal flow >1.5 gpm has activated the heater. The AL3-SL option provides these dry contacts and additionally activates a local audible and visual alarm on the heater. Alarms activate at 1.5 gpm flow or greater.

### Freeze Protection

The S19361F includes heater with ENHT which offers protection to -20°F (-28°C). The ENHT30 option offers protection to -30°F (-34°C). Each level of protection utilizes the normal heater supply voltage. No additional dedicated circuit to the unit is required during field installation. Freeze protection (ENHT and ENHT30 options) include an internally insulated NEMA 4/4X enclosure and thermostatically controlled forced air heater to maintain internal temperatures above freezing. Freeze protection options also include a connection point for DCS monitoring. IN the event of a power interruption or ENHT system failure when internal enclosure temperatures reach 40°F (4.4°C) or lower, the unit will notify a facilities control/monitoring system that the unit is unable to maintain freeze protection. Regardless of state of power to the unit, this warning notifies maintenance personnel and provides an opportunity to correct the condition before any damage occurs to the unit.

### Ground Fault

Optional equipment protection ground fault senses leakage current to ground >1 Amp. In the event a fault is detected, this device will terminate the high voltage power supply to heating elements and disable operation of the unit. Fault status is communicated EXTERNALLY at the control interface. Personnel may also test the Ground Fault system and reset any nuisance trips without opening the cabinet.

### Continuous Flow Explosion Proof Purge System

Keltech's EXP2CFPM option makes heaters compliant for classified areas; Class 1, Division 2, Groups A-D, T5. The Purge System requires a supply of clean instrument air or inert gas (provided by installer). This supply maintains a positive internal pressure and prevents the enclosure from filling with flammable gasses, dusts or vapors from the ambient environment. In addition to manufacturer certifications on the purge system, Keltech independently tests and 3rd party certifies all finished product with EXP2CFPM to comply with NFPA 496.

### ASME Heat Exchanger

Keltech offers any product above 200,000 btu equivalent (58kw+) the option to be fitted with internal plumbing certified to Section IV of the ASME Boiler and Pressure Vessel Code - an industry exclusive certification. HLW certification represents not only an approved design and method of construction, but an intensively audited construction and documentation process that concludes with a pressure test witnessed by an ASME official. Upon completion of this process, each heat exchanger is issued a unique serial number for registration in the National Board. This information is supplied with the unit via Form "HLW-6 Manufacturer Data Report" for verification and reference by local inspection officials. The HLW options also include additional features such as dry-fire protection, stainless steel bulkheads and boiler drain valves, adding an extra level of quality and durability to Keltech heaters.

### Other Product Options

For additional heater options and installation accessories, reference the appropriate section at the end of this document.

## Heater Code Compliance and Certifications



Lead-Free

Products marked with the Lead-Free logo comply with the Safe Drinking Water Act (SDWA) requirements of a weighted average of less than 0.25% lead content on wetted surfaces of pipes, pipe fittings, plumbing fittings, and fixtures.



ETL listed to UL499

ETL listed to UL 50E

ETL listed to NFPA 496 (Requires EXP2CFPM Option)

cETL listed to CSA-C22.2 No. 88



Standard product selections contained within this document are third party CERTIFIED to NSF/ANSI 372 meeting the Lead-Free content requirement. Any product configured with custom options will be COMPLIANT with NSF/ANSI 372 meeting the Lead-Free content requirement.



ASME Certification available. Keltech units 58kW (200,000 btu) and higher are the only electric tankless water heaters National Board certified with the HLW stamp (Requires HLW Option).

## Safety Shower Code Compliance and Certifications





## S19361HF - Pre-Assembled Freeze-Protected Safety Shower Heater Skid Tankless Water Heating Safety Solutions

### Electrical Specifications for the Heater (3-Phase)



All internal fuses necessary for installation are included with the unit.

Capacity (kW)	Voltage	Maximum Amperage	Minimum AWG Wire Size
54	480	65	4
54	600	52	6
63	480	76	4
63	600	61	4
72	480	87	3
72	600	69	4
108	480	132	1
108	600	104	2
126	480	152	1/0
126	600	121	1
144	480	174	2/0
144	600	139	1/0

### S19361HF Series Pressure Drop Advantage

GPM	1.5	2	3	4	5	6	8	10	15	20	25	30	35	40	45	50
<b>54-63 kW PSI</b>	0.0	0.0	0.1	0.2	0.2	0.3	0.6	0.9	2.0	3.6	5.5	7.9	10.8	14.0	17.6	21.7
<b>72-144 kW PSI</b>	0.0	0.0	0.1	0.2	0.3	0.4	0.8	1.2	2.6	4.7	7.3	10.4	14.2	18.5	23.3	28.7
<b>L-MIN</b>	5.7	7.6	11.3	15.1	18.9	22.7	30.2	37.8	56.7	75.6	94.5	113.4	132.5	151.2	170.1	189
<b>54-63 kW BAR</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.4	0.5	0.7	1.0	1.2	1.5
<b>72-144 kW BAR</b>	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.2	0.3	0.5	0.7	1.0	1.3	1.6	2.0





# S19361HF - Pre-Assembled Freeze-Protected Safety Shower Heater Skid Tankless Water Heating Safety Solutions

## S19361HF Series - Dimensions

(mm)

Select product options shown. Other options available.

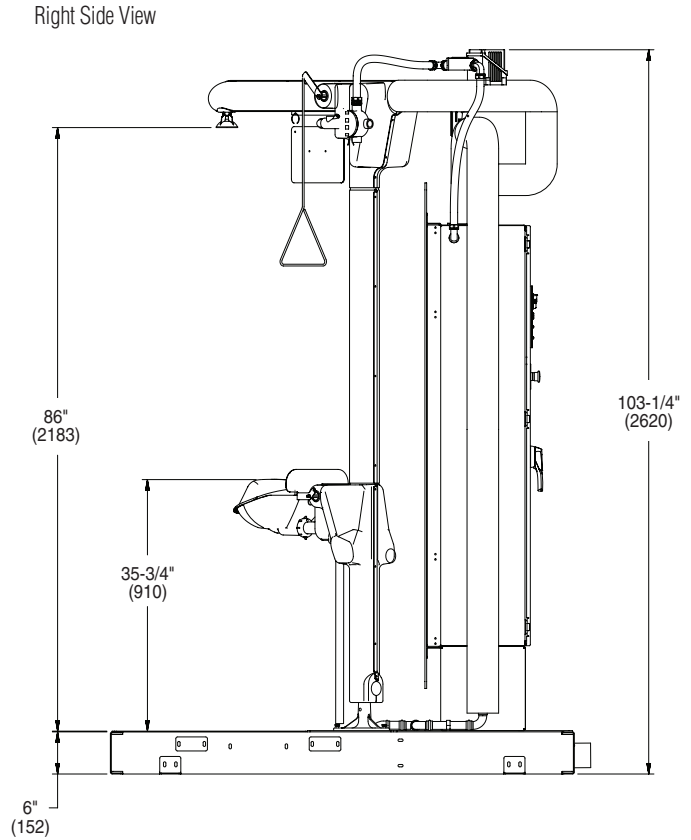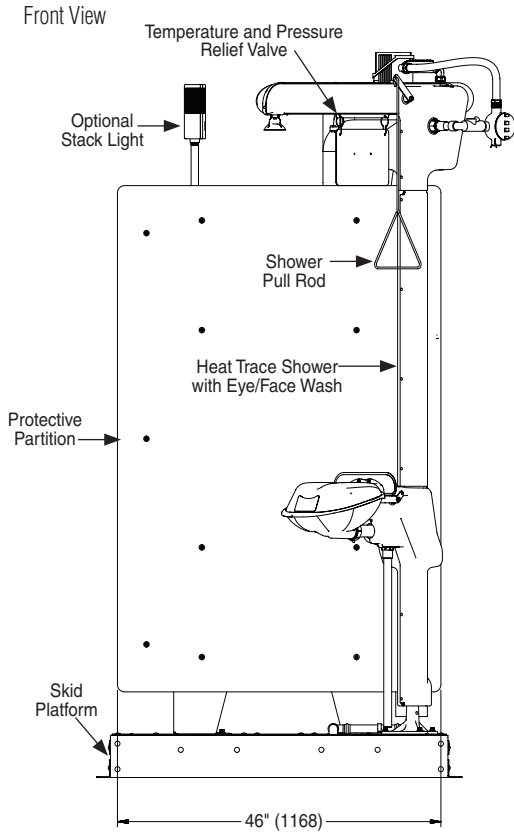




# S19361HF - Pre-Assembled Freeze-Protected Safety Shower Heater Skid Tankless Water Heating Safety Solutions

## S19361HF Series - Dimensions


(mm)

Select product options shown. Other options available.

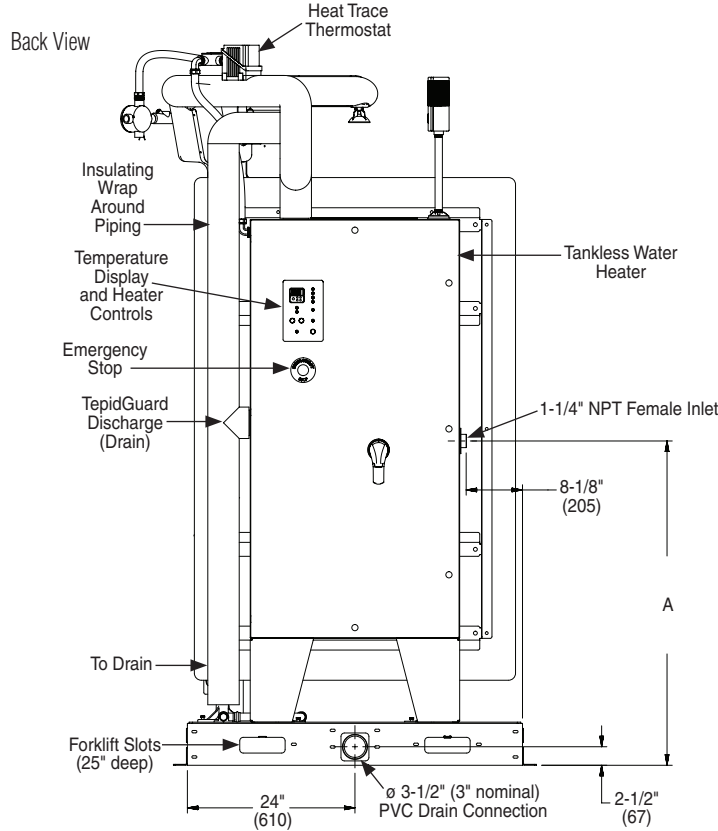

Dim. "A"	
54kW	34-1/2" (876)
63kW	46-1/2" (1180)
72kW	34-1/2" (876)
108kW	34-1/2" (876)
126kW	46-1/2" (1180)
144kW	46-1/2" (1180)

Top View

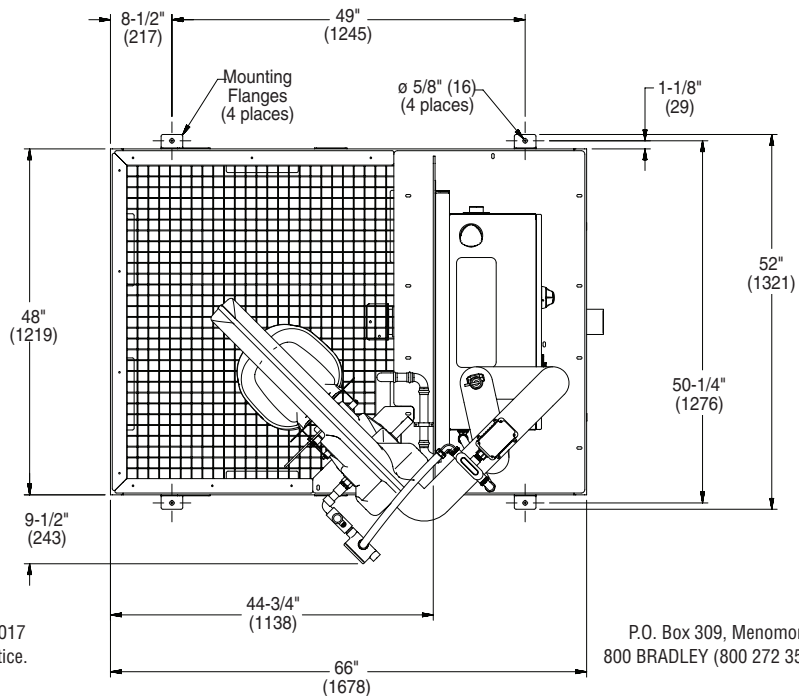



# S19361HF - Pre-Assembled Freeze-Protected Safety Shower Heater Skid Tankless Water Heating Safety Solutions

## Heater kW Calculator

SNA-Series (kW): 54, 63, 72, 108, 126, 144

		Temperature Δ°F (°C)																																	
		10° (6°)	15° (8°)	20° (11°)	25° (14°)	30° (17°)	35° (19°)	40° (22°)	45° (25°)	50° (28°)	55° (31°)	60° (33°)	65° (36°)	70° (39°)	75° (42°)	80° (44°)	85° (47°)	90° (50°)	95° (53°)	100° (56°)	105° (58°)	110° (61°)	115° (64°)	120° (67°)	125° (69°)	130° (72°)	135° (75°)	140° (78°)							
Flow	GPM L-MIN	2 7.6	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54							
	3 11.3	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	63	63					
	4 15.1	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	72	108	108	108	108
	5 18.9	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108
	6 22.7	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108
	7 26.5	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108
	8 30.2	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108
	9 34.0	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108
	10 37.8	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108
	12 45.4	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108
	15 56.7	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108
	20 75.6	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108
	25 94.5	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108
	30 113.4	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108
	35 132.3	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108
40 151.2	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108	
45 170.1	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108	
50 189.0	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	54	63	63	72	72	108	108	108	108	

ASME Certification Available



*Sizing for the proper flow rate is important. If the temperature rise requirements exceed a single SNA model, consider using model SNA-SKID series units to supply tepid water to multiple emergency fixtures. Please contact your Keltech Representative for additional product information.*

## How to Size a Heater

1. Calculate Delta-T (ΔT).  
Set point temp - coldest ground water temp = ΔT      ΔT = \_\_\_\_\_
2. Select kW required by using chart or formula below.  
Peak demand in GPM x ΔT x .1465 = kW      kW = \_\_\_\_\_
3. Confirm voltage and phase available on site.      Voltage and Phase = \_\_\_\_\_
4. Confirm minimum flow.      Minimum Flow = \_\_\_\_\_



# S19361HF - Pre-Assembled Freeze-Protected Safety Shower Heater Skid Tankless Water Heating Safety Solutions

<b>Heater Model</b>	
<input checked="" type="checkbox"/> <b>SNA</b>	SNA-Series - Safety Shower Heater with TepidGuard™
<input checked="" type="checkbox"/> <b>SKID2</b>	Safety Skid and 1-1/4" pre-piped assemblies mounted to SNA Series Heater
<b>Standard Heater Selections</b> (Must select one from each category)	
<b>Kilowatts</b>	
<input type="checkbox"/> <b>54</b>	54 kilowatts
<input type="checkbox"/> <b>63</b>	63 kilowatts
<input type="checkbox"/> <b>72</b>	72 kilowatts
<input type="checkbox"/> <b>108</b>	108 kilowatts
<input type="checkbox"/> <b>126</b>	126 kilowatts
<input type="checkbox"/> <b>144</b>	144 kilowatts
<b>AC Power Supply</b>	
<input checked="" type="checkbox"/> <b>3</b>	Three Phase
<b>Voltage</b>	
<input type="checkbox"/> <b>480</b>	480 Volts
<input type="checkbox"/> <b>600</b>	600 Volts
<input type="checkbox"/> <b>380</b>	380 Volts (down rated from 480V)
<input type="checkbox"/> <b>400</b>	400 Volts (down rated from 480V)
<input type="checkbox"/> <b>415</b>	415 Volts (down rated from 480V)
<b>System Controller</b>	
<input checked="" type="checkbox"/> <b>D</b>	Digital Control
<b>Cabinet Enclosure</b>	
<input type="checkbox"/> <b>N4</b>	NEMA-4 Enclosure (standard)
<input type="checkbox"/> <b>N4X</b>	NEMA-4X Enclosure - Stainless Steel
<input type="checkbox"/> <b>N4X316</b>	NEMA-4X Enclosure - 316 Stainless Steel

<b>Asset Tag</b>	
<input type="checkbox"/> <b>00</b>	None
<input type="checkbox"/> <b>01</b>	1 Asset Tag
<input type="checkbox"/> <b>02</b>	2 Asset Tags
<input type="checkbox"/> <b>03</b>	3 Asset Tags
<input type="checkbox"/> <b>04</b>	4 Asset Tags
<input type="checkbox"/> <b>05</b>	5 Asset Tags

- Heaters listed above can be down rated in 380, 400 and 415 volts. Contact your local Keltech Representative for power ratio and effective kW.
- Keltech Tankless Water Heater Skid Systems are non-cancelable, non-refundable and non-returnable.
- Verify ASME Code applicability for all installations 58kw (200,000 btu) and higher.

<b>Product Options</b> (Must select one from each category)	
<input type="checkbox"/> <b>AL3-SL</b>	Stack Light with Distributed Control System Link
<input type="checkbox"/> <b>NONE</b>	None
<input type="checkbox"/> <b>EXP2CFPM</b>	Continuous Flow Explosion Proof Class1/Division2
<input type="checkbox"/> <b>NONE</b>	None
<input type="checkbox"/> <b>ENHT30</b>	Freeze Protection to -30°F
<input type="checkbox"/> <b>NONE</b>	None
<input type="checkbox"/> <b>FDS*</b>	Internal Fused Disconnect
<input type="checkbox"/> <b>NONE</b>	None
<input type="checkbox"/> <b>GF</b>	Ground Fault Package
<input type="checkbox"/> <b>NONE</b>	None
<input type="checkbox"/> <b>HLW</b>	ASME Heat Exchanger with Level Sensor (63kW and Higher Only)
<input type="checkbox"/> <b>NONE</b>	None

<b>Safety Shower Model</b>	
<input checked="" type="checkbox"/> <b>A</b>	S19-304D2T - Heat traced combi unit. Class 1/Div 2, top supply, 120V, ABS showerhead, Halo eye/face wash, no alarm, no light, no drench hose, no anti-scald valve.

<b>Installation Accessories</b>	
<input type="checkbox"/> <b>BSPP</b>	Stainless steel thread adapter converts NPT to BSPP
<input type="checkbox"/> <b>NONE</b>	None
<input type="checkbox"/> <b>PRS**</b>	ASME pressure relief valve, stainless steel
<input type="checkbox"/> <b>NONE</b>	None
<input type="checkbox"/> <b>YS</b>	Y-Strainer
<input type="checkbox"/> <b>YSS</b>	Y-Strainer, stainless steel
<input type="checkbox"/> <b>NONE</b>	None

\* Not available with SNA-723/600D  
 \*\*Bronze pressure and temperature relief valve included as standard.

<b>Application Attributes (MANDATORY)</b>	
Coldest ground water temperature:	_____
Minimum Flow:	_____
Maximum Flow:	_____
Set point temperature 80°F/ 27°C:	_____

**Delta T Calculation**  
 Set Point Temperature - Coldest Incoming Water Temperature = Minimum Delta T for Application

## Model Number Configuration

<b>S19361HF-SNA-</b>	<b>3 /</b>	<b>D -</b>	-	-	-	-	-	-
	kW	Volts						
<b>INSTL_ACCESSORY -</b>	-	-	-					

Customer Signoff \_\_\_\_\_