




S19-120HFP

Frost-Proof Wall-Mounted Drench Shower

Standard Equipment

SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic for high visibility in emergency situations. SpinTec drench showerhead features integral 22 GPM (83.3 L) flow control, conserving water and helping to accurately size your tepid water system.

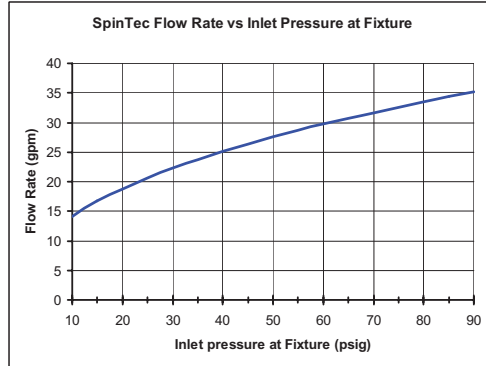

Frost-Proof Shower Valve

Chrome-plated brass 1" NPT stay-open valve. Hand operated by a stainless steel push handle. Standard depth 36" (914mm). Special order for other bury depths (18", 48", 60", 72").



Special order depths are non-returnable.

Pipe and Fittings

1" galvanized steel with BradTect® safety yellow coating. Standard wall thickness is 8"-12". Special order for other wall thicknesses. (0"-8" or 12"-18").

Water Supply

1" NPT.

