

- Complies with American National Standard Z358.1-2009
- Acts as a Stationary Eye/Face Wash or Hand-Held Spray for Eyes and Face or Body Rinsing
- Highly Visible Yellow-Colored Hose
- Bracket Included
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Model S19-620 is SEI-certified to ANSI Z358.1-2009



Specifications

Quick-access emergency eye/face spray features soft-flow dual sprayheads for flooding large areas as well as eyes only. Self-coiling hose retracts for easy storage while allowing instant extension in emergency situations. Water flows when handle is squeezed. Hand-held hose sprayhead contains an antimicrobial agent to protect the sprayhead.

cUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

- This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.
- Drench hoses must provide a controlled flushing fluid flow that is both tepid and non-injurious to the user per ANSI Z358.1-2009. Refer to ANSI Z358.1-2009 for complete regulatory information regarding the performance, installation, maintenance, and training requirements for drench hoses.
- Installer to supply backflow prevention as required by UPC, IPC and/or local plumbing codes. Contact Bradley or visit bradleycorp.com for available options.

Standard Equipment

Eye/Face Dual Sprayheads

Perforated sprayheads are ABS plastic and feature soft-flow dual sprayheads for flooding large areas as well as eyes only. Includes protective sprayhead covers. Integral flow control assures safe, steady flow under varying water supply conditions.

Valve


Chrome-plated brass with extended handle stays open once handle is squeezed.

Drench Hose

12' (3655mm) yellow reinforced thermoplastic hose is self-coiling. Burst strength is 660 PSI. Supply is 1/2" female NPT.

Wall Bracket


Metal parts of bracket for sprayhead/valve assembly are stainless steel.

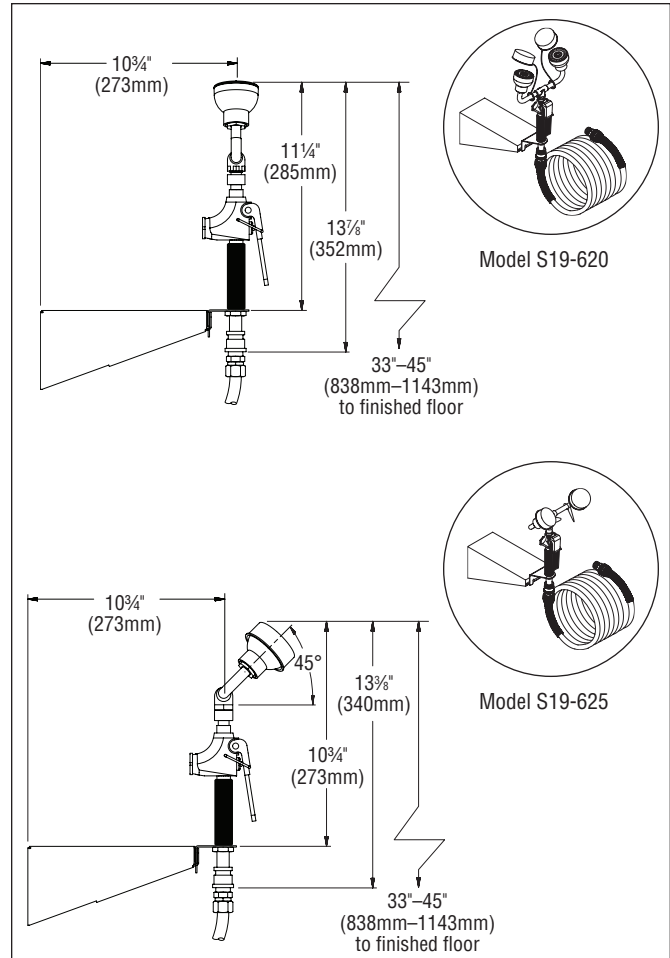

Recommended Option:

Navigator S19-2000 EFX8
Emergency Thermostatic Mixing Valve

NAVIGATOR



Satisfies ANSI Z358.1-2009
tepid water requirements.

Model	Description
<input type="checkbox"/> S19-620	Dual Purpose Stationary or Removable Eye/Face Wash
<input type="checkbox"/> S19-625	Dual Purpose Stationary or Removable Eye/Face Wash with Angled Sprayheads
<input type="checkbox"/> S27-303	Series7 Dual-Check Backflow Preventer
<input type="checkbox"/> S45-2309	Series8 Dual-Check Vacuum Breaker
<input type="checkbox"/> S45-2310	Series9D Dual-Check Backflow Preventer