

- Complies with American National Standard Z358.1
- Concealed Unit
- Activates with Opening of Stainless Steel Door
- Water Collects Back Into the Cabinet's Internal Drain
- Chrome-Plated Brass Pipe and Fittings
- Universal Sign and Inspection Tag Included
- Designed to Mount Between Standard 16" Wall Studs
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1



Specifications

Unit design saves space and fits easily into any work environment. Stainless steel cabinet and door conceal eyewash with a consistent and appealing exterior appearance, suitable to any application. Especially ideal for areas where space is limited or where a floor drain is not available. Eyewash activates by pulling the cabinet door down. A gas spring softens the action of opening the unit allowing the door to descend in a smooth and controlled manner. Water is collected by the door assembly and directed back into the wall for drainage. Eyewash has an integral flow control in the shank. Unit is flush-mounted in the wall. An optional bottom-fed thermostatic mixing valve (S19-2000) can be installed inside the maintenance compartment of the S19-282 or the S19-282PT. The S19-2000 can be easily accessed through the maintenance door below the fixture.

Rough-Ins:

S19-282 and S19-282PT require a rough wall opening of 14½"W x 32¼"H x 4"D.



This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.

Standard Equipment

Eyewash Sprayhead Assembly

Chrome-plated brass sprayhead assembly with twin, soft flow eyewash heads. Safe, steady water flow under varying water supply conditions from 30-90 PSI is assured by an integral flow control.

Cabinet

Corrosion resistant stainless steel cabinet and doors. Top section of the door conceals the eye/face wash unit which is activated with a plastic molded wide grip handle. Bottom of cabinet conceals tailpiece and fittings, and is provided with a locking device to prevent tampering with the unit. Open back and side panels in the bottom section of cabinet to accommodate multiple waste options.

Valve

Chrome-plated brass ½" NPT stay-open valve. Water flow is activated by pulling swing arm down 90°. Water will continue to flow until arm is returned to original position.

Pipe and Fittings



Chrome-plated brass.

Water Supply


½" NPT.

Waste

1¼" drain provided with tailpiece. P-trap waste option also available (S19-282PT).

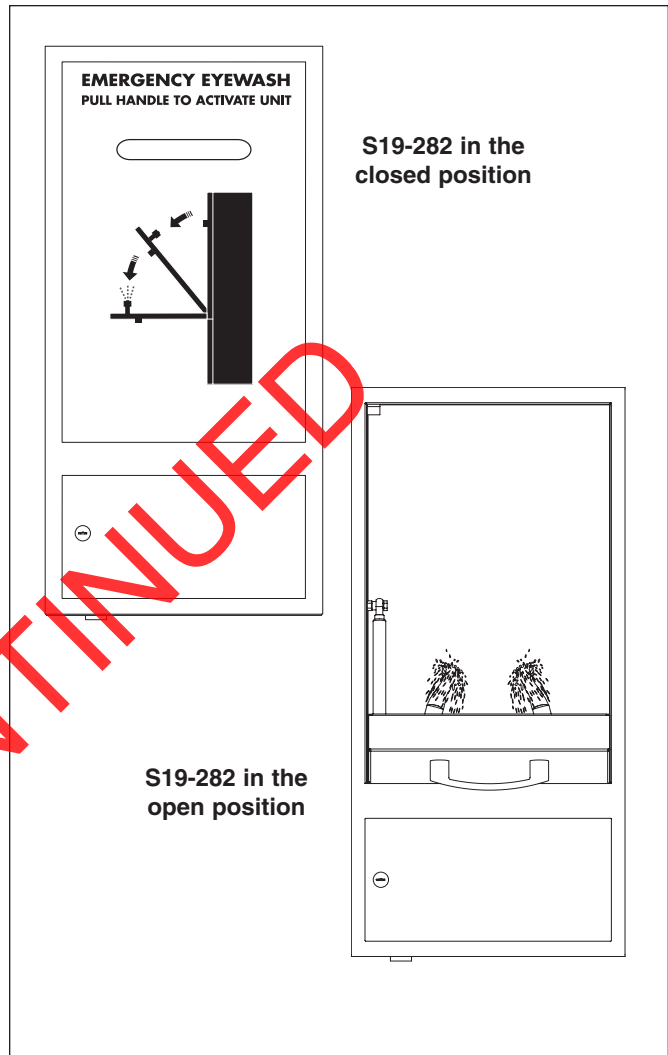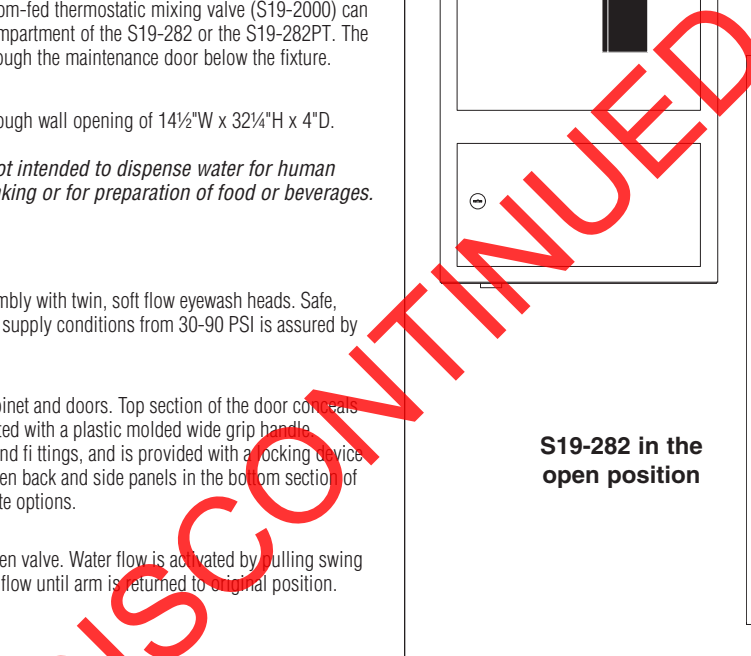

Recommended Option:
 Navigator S19-2000 EFX8
 Emergency Thermostatic Mixing Valve




NAVIGATOR

Satisfies ANSI Z358.1
 tepid water requirements.

Model	Description
<input type="checkbox"/> S19-282	Barrier-Free Cabinet-Concealed Swing-Down Eyewash Unit
<input type="checkbox"/> S19-282PT	Barrier-Free Cabinet-Concealed Swing-Down Eyewash Unit with P-trap
<input type="checkbox"/> S19-2000	Navigator EFX8 - Emergency Thermostatic Mixing Valve

S19-282 and S19-282PT

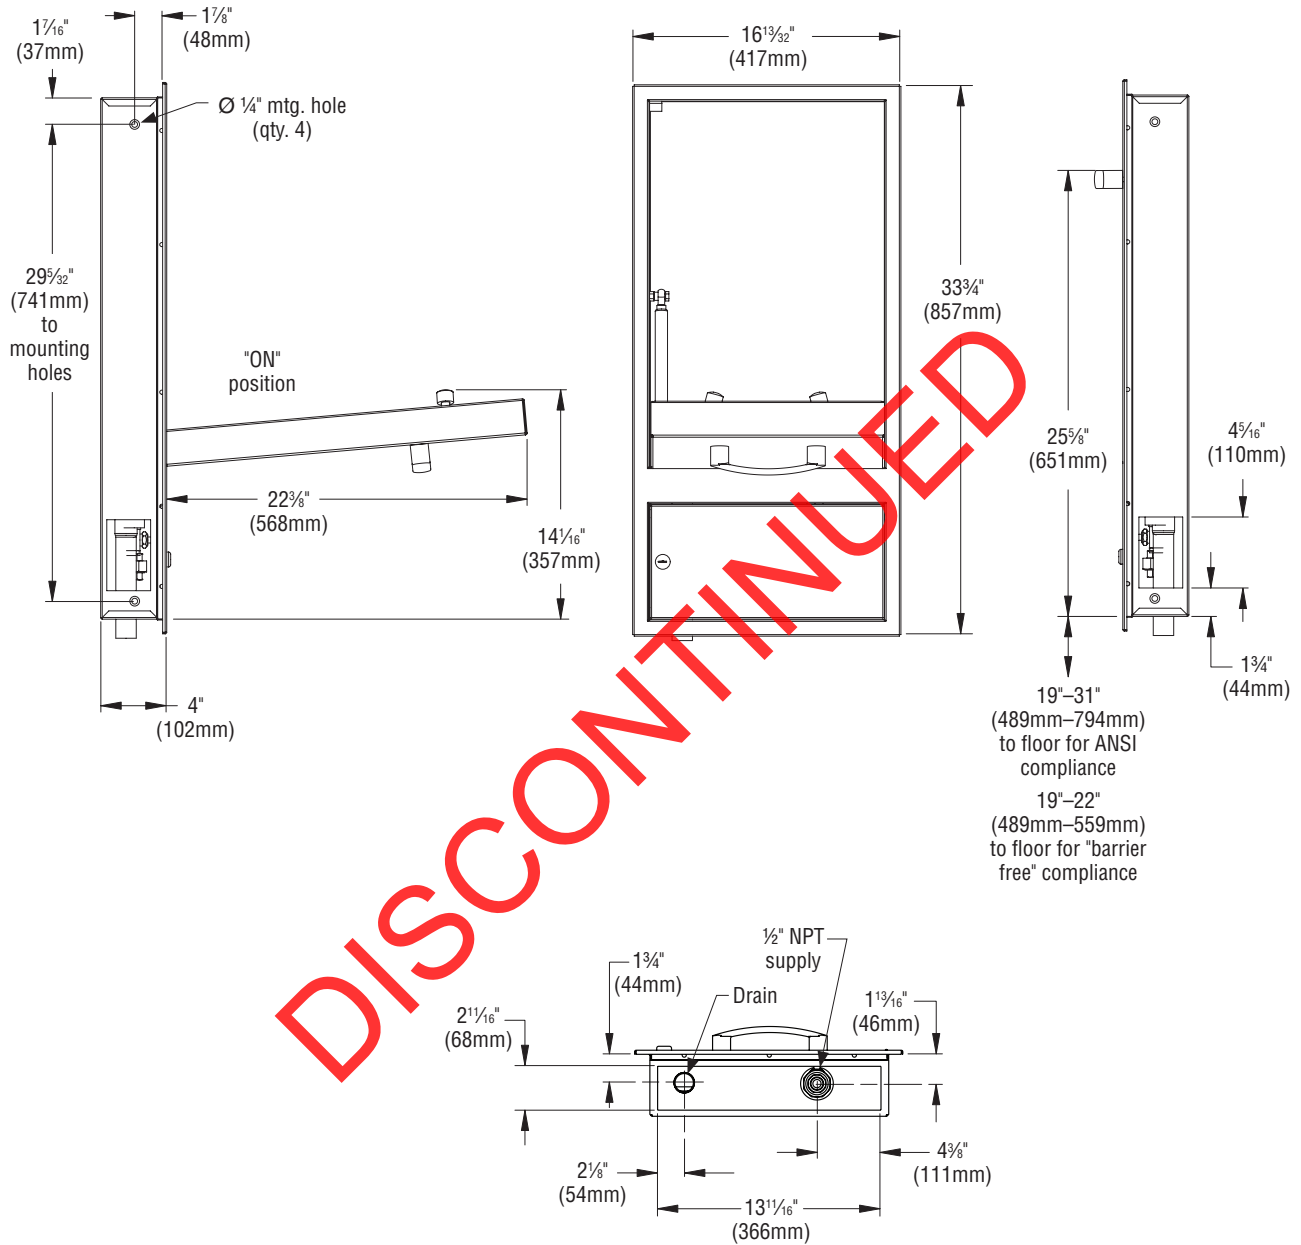

DISCONTINUED