



Urinal Screens Fusion Granite

Floor-mounted Urinal Screen

Dog-leg screen has floor mounting and requires minimum 3" concrete floor for anchoring.

Construction

Urinal Screens

Pre-drilled dog-leg urinal screens are 1 $\frac{3}{8}$ " (3cm) thick, constructed from natural granite. The floor edge of the leg shall be provided with 12 gauge mounting brackets (attached in the field with thru bolts provided) that will accept a $\frac{3}{8}$ " zinc-plated jack bolt for leveling. Continuous, undrilled "L" brackets shall be provided for attachment to the wall. 4" high one-piece shoe of 300 Series stainless steel shall be secured by clear silicone (provided by others).


Hardware

Urinal screens shall be provided with all stainless steel hardware and fastenings to provide a complete installation.

Standard Selections

Screen Colors

Golden Garnet	Luna Pearl
Pine Green	Tropical Brown

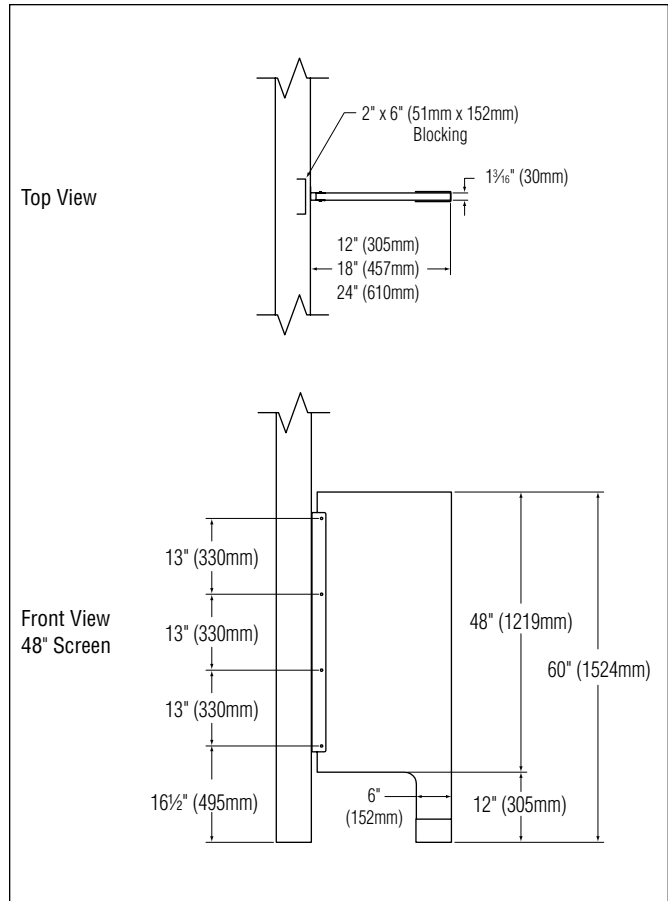

Verify all rough-in dimensions prior to installation.

Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

Page 1 of 1 4/23/2019

This information is subject to change without notice.

Bradley_UrinalScreen_FusionGranite

© 2019 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com