

Model 2A25-3600 — Recessed
(recesses 9¹³/₁₆" ; projects 4⁷/₈")

Model 2A25-1036 — Semi-Recessed
(recesses 4" ; projects 10¹¹/₁₆")

Model 2A25-1136 — Surface-Mounted
(projects 14¹¹/₁₆")

☒ Diplomat Series

☒ Roll Paper Towels

Product Materials

CABINET: 0.030-inch/22ga.-(0.76 mm) stainless steel with exposed surfaces in architectural satin finish. Welded construction with seamless corners and burr-free edges.

FLANGE: 0.030-inch/22ga.-(0.76 mm) stainless steel with exposed surfaces in architectural satin finish. One piece seamless construction, 1" wide with ¼" return.

DOOR: 0.030-inch/22ga.-(0.76 mm) stainless steel with full length piano hinge and tumbler lock keyed like other Bradley units.

WASTE CONTAINER: 0.030-inch/22ga.-(0.76 mm) stainless steel with exposed surfaces in architectural satin finish. All welded construction. Secured to cabinet with tumbler lock keyed like other Bradley units. Front of cabinet has matching curvature to other Bradley Diplomat washroom accessories.

TOWEL DISPENSER: furnished (2489-000000).

Capacity


Dispenses non-perforated, universal paper roll towels up to 8" in diameter and 8" wide with core sizes from 1½"-2".

Operation

Towels are dispensed automatically when hands are naturally positioned below the hand wave icon located near the center/bottom of cover. Paper can be exposed or concealed. Sensing range can be set to 2", 3" or 4". Sensor delay can be immediate (0 seconds), 1 second, or 3 seconds. Paper length can be set to 10", 12", or 14". Operates with 4 "D" size alkaline batteries or an AC adapter. Batteries are not included. Activation, low battery, and paper out indicator. Manual PUSH lever is centered under the unit for manually dispensing towels. Operates with less than 5 lb of force.

Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 15½" W x 54½" H x 9⅞" D (Semi-recessed unit only 4" deep). Secure to framing with mounting screws (not included) at holes provided. Shim at screw points as required. Surface mounted units must have holes drilled by installer.

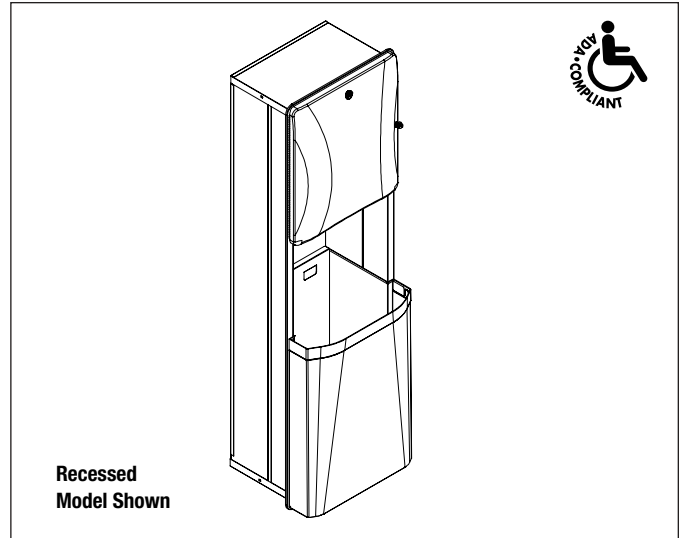

Optional Selections

Vinyl Liner (P11-043)

Guide Specification

Sensor-activated roll paper towel dispenser and 21 gal./2.8 cu. ft. capacity waste receptacle in [recessed] [semi-recessed] [surface-mounted] wall cabinet. Towel dispenser door and waste receptacle faces formed with contemporary contours, radii, and finish matching related accessories in manufacturer's designer series. Towel dispenser capacity one: 8-inch wide by 8¼-inch diameter standard paper towel roll with sensor-activated towel dispensing mechanism, with hinged service door with keyed tumbler lock. Waste receptacle removable from cabinet with keyed tumbler lock. Universal keying. Formed from stainless steel sheet with satin finish on exposed surfaces, fully welded, with seamless corners and burr-free edges: cabinet and flange 0.030-inch / 22-ga. thick; door and waste receptacle 0.036-inch / 20-ga. thick. Towel dispenser operates with 4: D-size alkaline batteries.

Overall dimensions: 17⅞" W x 56" H x 14¹¹/₁₆" D.

MasterFormat Title: Commercial Toilet Accessories

MasterFormat Number: 10 28 13.13

OmniClass Title: Toilet and Bath Specialties

OmniClass Code: 23.31.25.00

Product Compliance

Complies with

• ADA



☒ Consult local and national accessibility codes for proper installation guidelines. Conformity and compliance to local national codes is the responsibility of the installer.

For information on Warranties, Maintenance and BAA/ARRA Compliance, visit our web site at: bradleycorp.com/products/accessories/.




A WATTS Brand

2A25

Combination Sensor-Activated Roll Towel Dispenser/Waste Container

Dimensions

(mm)

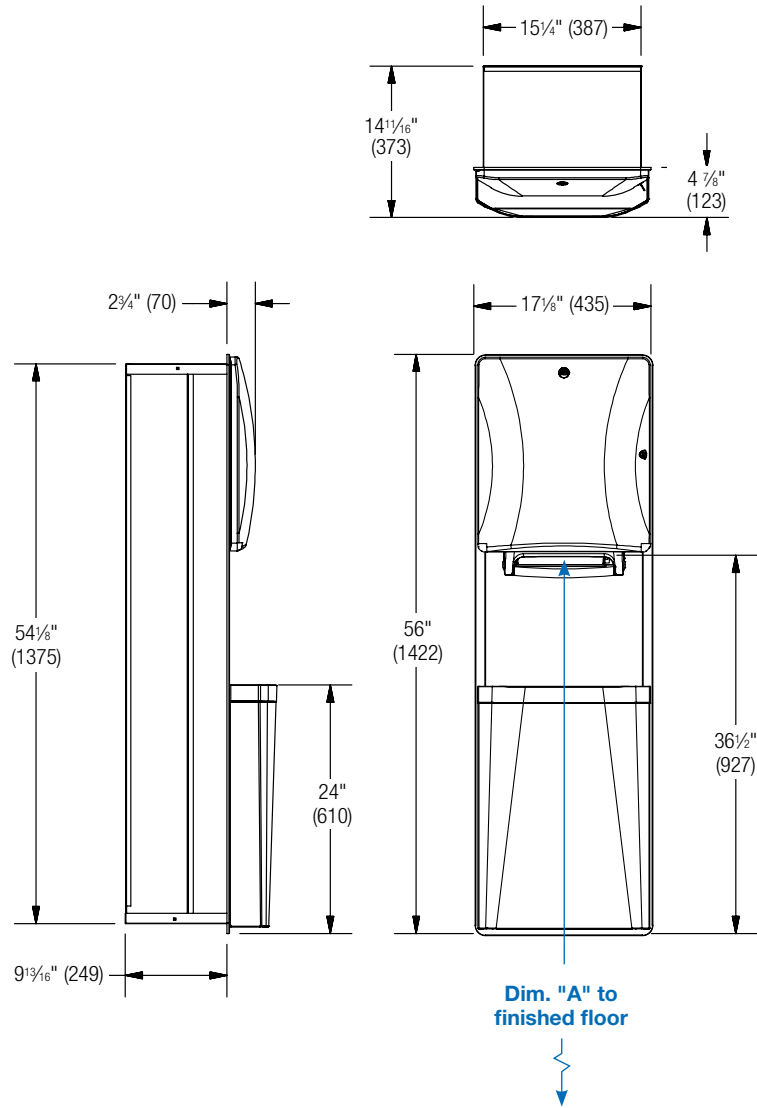

Dim. "A" Key Surface:	For Dim. "A"	Locate Top of Rough Wall Opening	Locate Bottom of Rough Wall Opening
Paper towel top of opening to finished floor	48" (1219)	66 1/4" (1683)	11 3/4" (298)
	45" (1143)	63 1/4" (1607)	8 3/4" (222)
	42" (1067)	60 1/4" (1530)	5 3/4" (146)
	40" (1016)	58 1/4" (1480)	3 3/4" (95)