

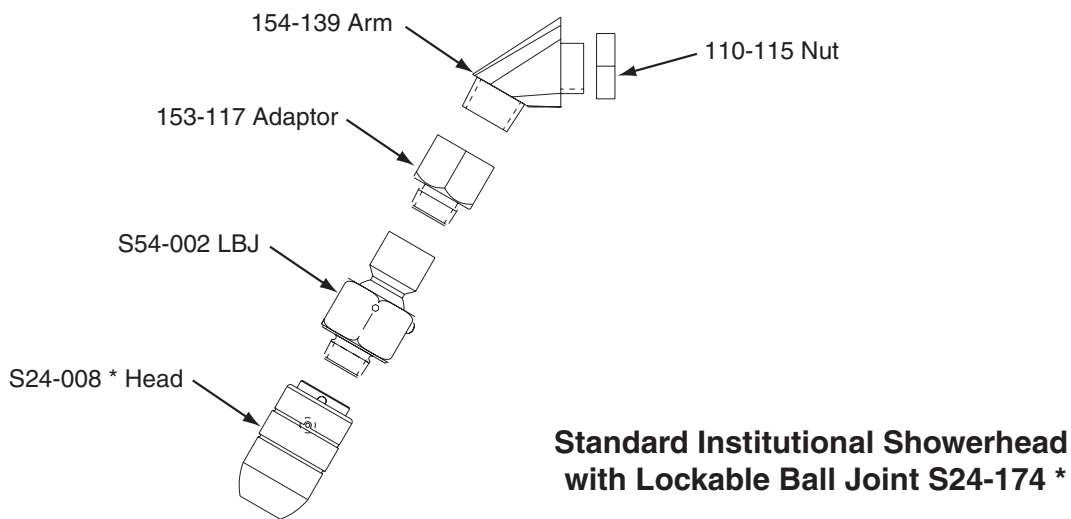


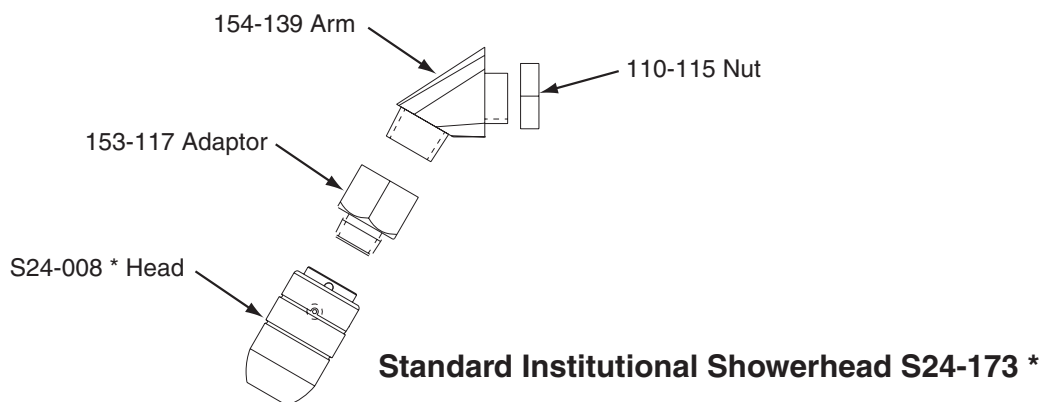

Operation and Service Guide: Showers

P.O. Box 309 • Menomonee Falls, WI 53052-0309
1.800.BRADLEY • 1.262.251.6000 • bradleycorp.com

WS-1X Showerheads

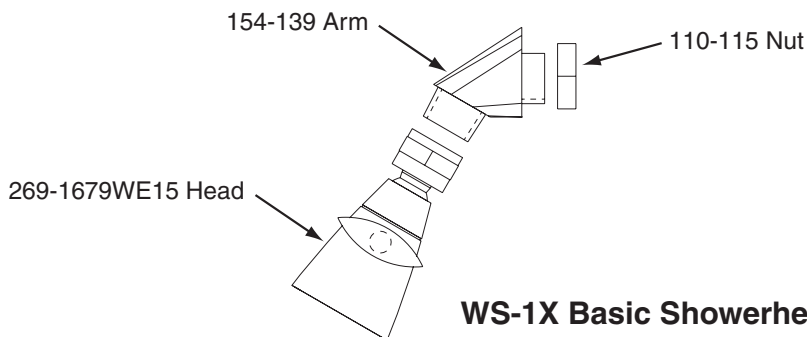

* Add suffix WE15 for 1.5 GPM Flow or
Add suffix WE20 for 2.0 GPM Flow
(Example: S24-173WE15 or S24-173WE20)



Operation and Service Guide: Showers

P.O. Box 309 • Menomonee Falls, WI 53052-0309
1.800.BRADLEY • 1.262.251.6000 • bradleycorp.com

Showerhead Type	Part No.	Max. Flow Rate @ 80 ±2 psi	Min. Flow Rate @ 45 ±2 psi
			Shower heads listed for use with automatic compensating valves rated at (see values below) or less
Brass (BS)	S24-172WE15	1.5 gpm (5.7 L/min)	1.4 gpm (5.3 L/min)
Standard Institutional (S)	S24-173*	2.5 gpm (9.5 L/min)	2.0 gpm (7.6 L/min)
	S24-173WE15	1.5 gpm (5.7 L/min)	1.4 gpm (5.3 L/min)
	S24-173WE20	2.0 gpm (7.6 L/min)	1.7 gpm (6.6 L/min)
Standard Institutional with Lockable Ball Joint (S-LBJ)	S24-174*	2.5 gpm (9.5 L/min)	2.1 gpm (7.9 L/min)
	S24-174WE15	1.5 gpm (5.7 L/min)	1.4 gpm (5.3 L/min)
	S24-174WE20	2.0 gpm (7.6 L/min)	1.7 gpm (6.6 L/min)

* 2.5 GPM flow rate does not meet California Energy Commission 20 CCR T.20, Div. 2, 1601-1609.