



S19-322E Recessed Emergency Signaling System

Key Features

- Recessed automatic, audible and visual system
- Double pole, double throw flow switch
- Ideal for cabinet mounted/swing activated eyewash fixtures
- Bright LED light

Specifications

System can be easily connected to most recessed, cabinet mounted eyewash or deck/wall mounted swing activated eyewash. Signaling system and horn designed to recess into an adjacent wall. Flow switch should be installed in a horizontal pipe run. Signaling system features a bright LED light with a wide viewing angle. Remote location hookup possible by using contacts in the flow switch junction box. System can only be installed indoors.

Standard Equipment

Central Control

Emergency fixture signaling system operates from one central control board. The central control offers several different easy to connect inputs and outputs, allowing for direct connection to a building management system and runs on a safe, 24V system. Electrical components are contained with a NEMA 1 enclosure.

Horn Sound

Built in 85 dB buzzer.

Beacon/Signal Light

Beacon provides bright green, steady LED light with wide viewing angle. Light switches to flashing amber LED signal with wide viewing angle upon fixture activation.

Voltage

Universal AC Input: 90-264 AC, 50-60 Hz. Max 15 Watts. Max 0.5 Amps.

Flow Switch Activation


Watertight and completely assembled for easy hookup to signaling system. Double pole, double throw flow switch in stainless steel construction.

Remote Wiring

Remote location hookup possible by using contacts in the flow switch junction box.

Pipe Size

½" NPT supply.

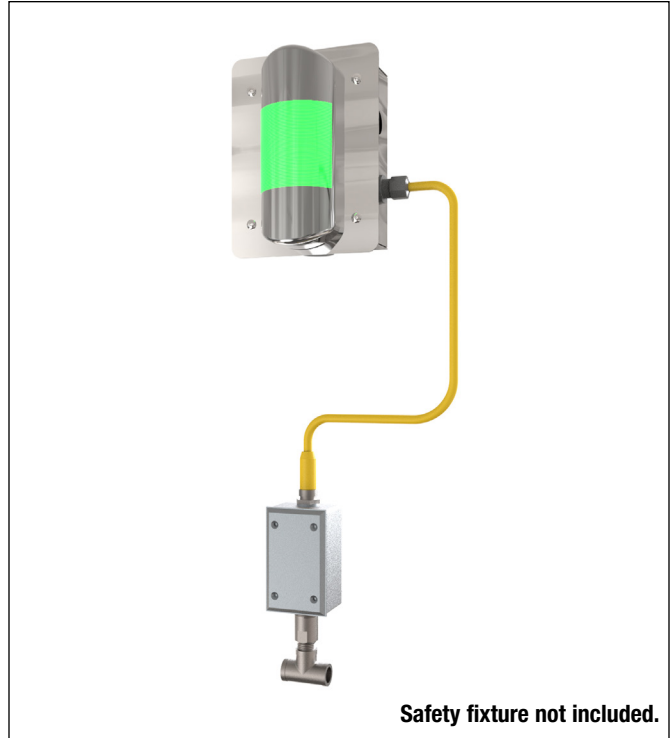

Model	Description
S19-322E	Recessed Emergency Signaling System