



Sight & Urinal Screens

Bradmar® Solid Plastic

Construction

Sight and Urinal Screens are constructed from 1" thick High Density Polyethylene (HDPE) resins pressed under high pressure to form a single component. This material is waterproof, non-absorbent and has a self-lubricating surface which resists marks from graffiti.

Sight Screens

Sight Screens are fabricated 55" high, all edges are rounded to a 3/16" radius. Sight Screens receive an aluminum heat sink strip fastened to the bottom edge which helps dissipate any applied heat. Sight Screens are attached with a continuous aluminum bracket at the wall and at the pilaster. They can also be attached with continuous stainless steel brackets or aluminum stirrup brackets. Also available with floor-mounted overhead braced pilasters, floor-to-ceiling pilasters or an aluminum post.

Urinal Screens

Urinal Screens are fabricated 48" high, all edges are rounded to a 3/16" radius. They are attached to the wall with continuous aluminum or stainless steel brackets or aluminum stirrup brackets. Also available with floor-braced pilasters, floor-to-ceiling pilasters or an aluminum post.

Hardware

Mills standard hardware is constructed from 6463-T-5 heavy-duty aluminum. Screens are provided with all hardware and stainless steel torx head with pin fasteners to complete installation for applications with concrete floors and masonry block walls.

Standard Selections (Must select one from each category)

Screen Colors


Beige	Gray
Black	Linen
Burgundy	Starry Night
Buttermilk	Toffee
Canyon Granite	100% Post-Consumer Charcoal*
Charcoal Gray	100% Post-Consumer Toffee*
Deep Blue	100% Post-Industrial Black
Desert Stone	

Wall Brackets

Continuous – Aluminum (STD)	Continuous – Stainless Steel
Aluminum Stirrup	


* 100% Post-Consumer HDPE may have some minor flaws and the color may be inconsistent.

Sight Screen

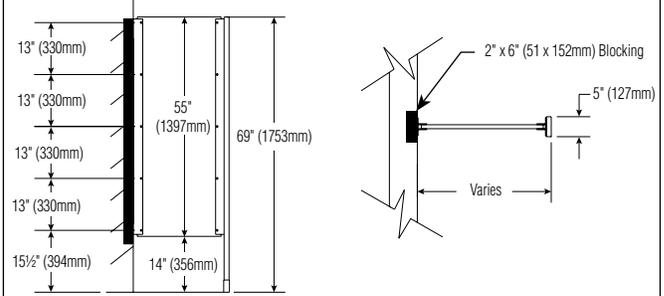


Generally recommended for Sight Screen application. Screen has floor mounting and requires minimum 3" concrete floor for anchoring.

Wall-Hung Urinal Screen with Continuous Brackets

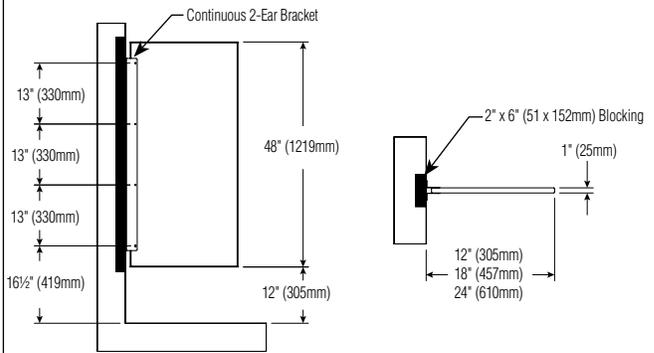

Most common Urinal Screen application.

Wall-Hung Urinal Screen with Stirrup Brackets

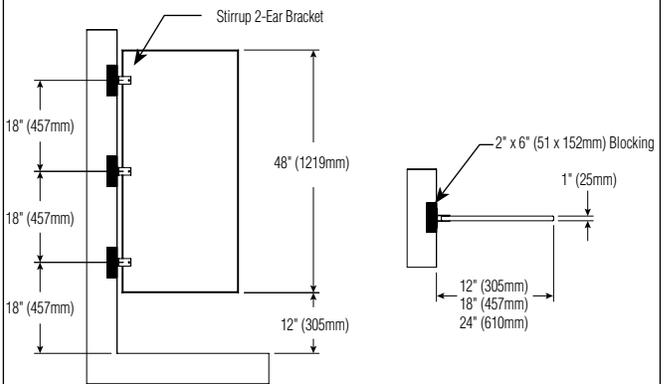

Verify all rough-in dimensions prior to installation.

Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.