

Model 237 — Recessed
Model 237-10 — Semi-Recessed
(recesses 3½"; projects 4")
Model 237-11 — Surface-Mounted
(projects 7½")

☒ Standard Series — Satin Finish

Product Materials

CABINET: 22-gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with seamless corners and burr-free edges.

FLANGE: 22-gauge stainless steel with exposed surfaces in architectural satin finish. One piece seamless construction, 1" wide with ¼" return.

DOOR: 18-gauge stainless steel. Warp resistant, with full length piano hinge and tumbler lock keyed like other Bradley units.

TOWEL DISPENSER: 22-gauge stainless steel. Rolled edge on dispenser opening.

WASTE RECEPTACLE: 22-gauge stainless steel. All welded construction. Secured to cabinet with tumbler lock keyed like other Bradley units.

LINER (optional): Heavy-duty stitched vinyl coated nylon. Part #P11-004.

Capacity

Towel Dispenser: 1100 single-fold, 800 multi-fold or 600 C-fold paper towels

Waste Container: 12 gal. (1.6 cu. ft.)

Operation

Towel dispenser holds single-fold, multi-fold or C-fold towels with use of special adaptor. Receptacle removable for easy servicing by unlocking waste container.

Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 15¼"W x 54½"H x 7½"D (Semi-recessed unit only 3½" deep). Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required. Surface-mounted units must have holes drilled by installer.

Guide Specification

Recessed combination towel dispenser and waste receptacle shall be fabricated of 22-gauge stainless steel with exposed surfaces in satin finish. Cabinet doors with full length piano hinge and secured by tumbler lock. Towel dispenser capacity 1100 single-fold, 800 multi-fold or 600 C-fold towels. Removable 12 gal. stainless steel waste receptacle. Reusable vinyl liner is optional.

Overall dimensions: 17-1/8"W x 56"H x 8-3/4"D.




ADA Compliant

- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.



(mm)

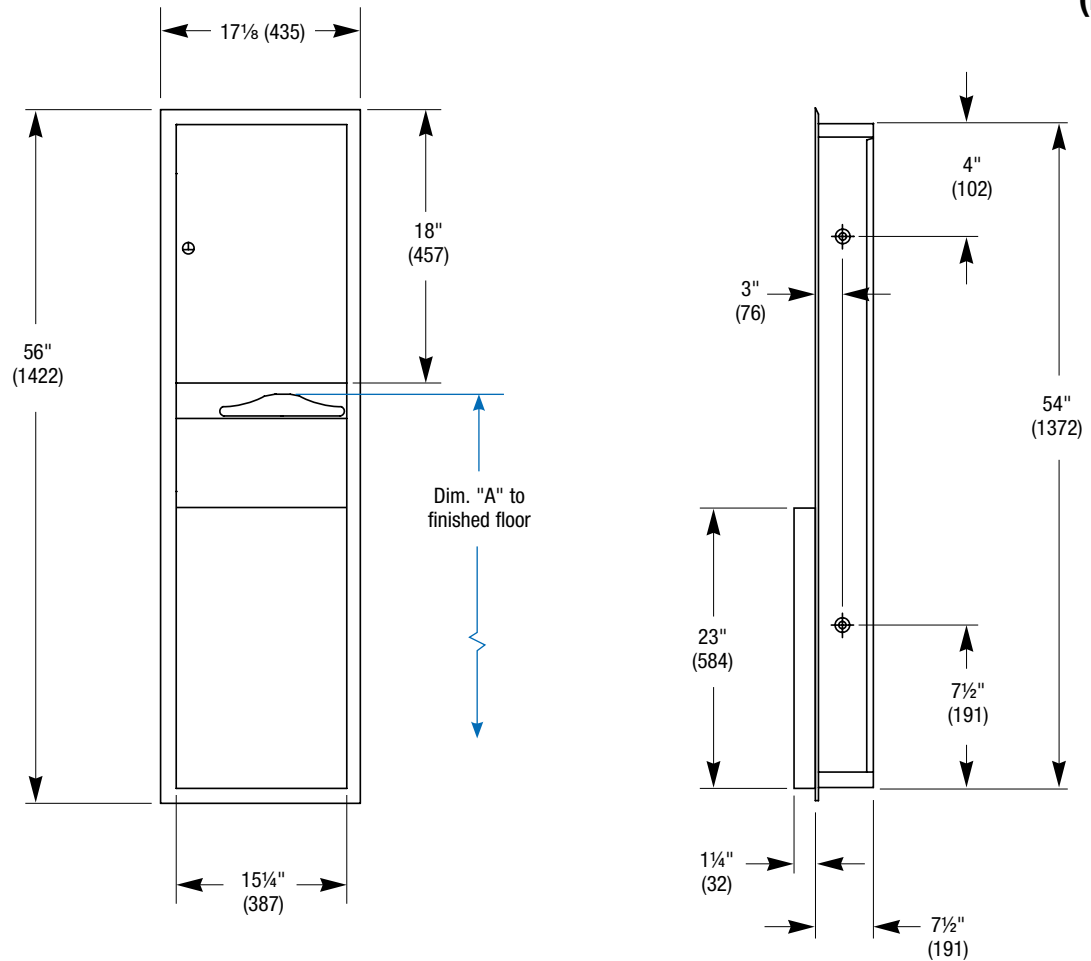

Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening
Paper towel top of opening to finished floor	48" (1219)	66¾" (1695)	12¼" (311)
	45" (1143)	63¾" (1619)	9¼" (235)
	42" (1067)	60¾" (1543)	6¼" (159)
	40" (1016)	58¾" (1492)	4¼" (108)
Rough wall opening:			
Surface Mount:	No rough opening, see overall dimensions		
Recessed:	15¾" (401) Wide x 54½" (1385) High x 7½" (191) Deep		
Semi-Recessed:	15¾" (401) Wide x 54½" (1385) High x 3½" (89) Deep		