



A WATTS Brand

3257

Waste Receptacle

Model 3257 — Recessed
Model 3257-10 — Semi-Recessed
(recesses 1½", projects 2½")
Model 3257-11 — Surface-Mounted
(projects 4")

- ☒ Contemporary Series — Satin Finish
- ☒ 2.8-Gallon Capacity

Product Materials

CABINET: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with seamless corners and burr-free edges.

DOOR: 18 gauge stainless steel. ½" return for maximum rigidity. Concealed full length stainless steel piano hinge and tumbler lock keyed like other Bradley units.

PUSH FLAP DOOR: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Heavy-duty stainless steel piano hinge.

WASTE RECEPTACLE INSERT: leakproof molded plastic.

Capacity

2.8 gal. (0.37 cu. ft.)

Operation

Waste receptacle insert removable by unlocking cabinet door.

Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 12⅝"W x 26⅝"H x 4"D. Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

Guide Specification

Recessed waste receptacle shall be fabricated of heavy gauge stainless steel with exposed surfaces in satin finish. Cabinet door of 18 gauge stainless steel with full-length piano hinge and secured by tumbler lock. Removable 2.8-gal. leakproof molded plastic insert for waste receptacle.

Overall dimensions: 14¼"W x 28¼"H x 4"D.



ADA Compliant

- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.






A WATTS Brand

3257

Waste Receptacle

Dimensions

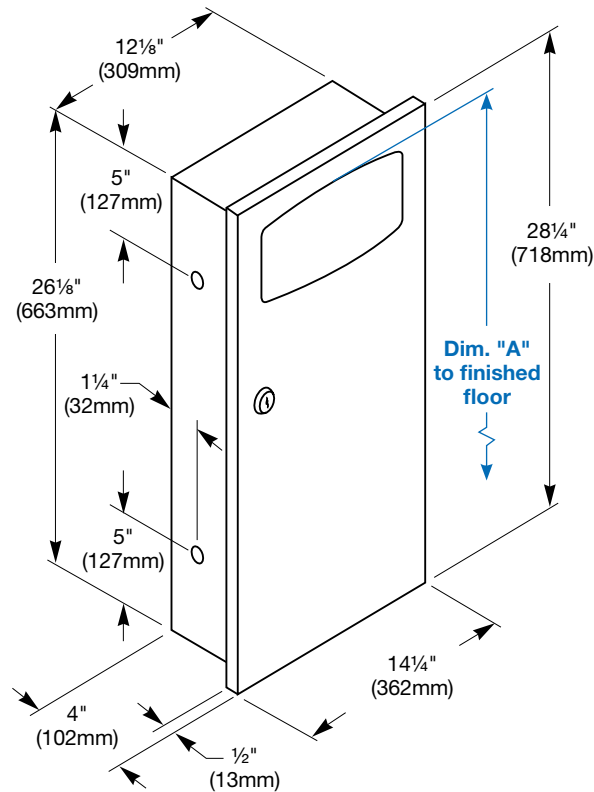

Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening
Top of door (5 1/2" door opening) to finished floor	48" (1219mm)	49" (1245mm)	22 3/8" (568mm)
	45" (1143mm)	46" (1168mm)	19 3/8" (492mm)
	42" (1067mm)	43" (1092mm)	16 3/8" (416mm)
	40" (1016mm)	41" (1041mm)	14 3/8" (365mm)
Rough wall opening:			
Surface Mount:	No rough opening, see overall dimensions		
Recessed:	12 3/8" (321mm) Wide x 26 3/8" (677mm) High x 4" (102mm) Deep		
Semi-Recessed:	12 3/8" (321mm) Wide x 26 3/8" (677mm) High x 1 1/2" (39mm) Deep		