

Model 334 — Recessed **BradEX**® (Waste container projects 8¾")
Model 334-10 — Semi-Recessed (recesses 2"; projects 10¾")
Model 334-11 — Surface-Mounted (projects 12¾")

Standard Series — Satin Finish

✓ 18-Gallon Capacity

#### **Product Materials**

**FLANGE:** 22-gauge stainless steel with exposed surfaces in architectural satin finish. One piece seamless construction, 1" wide with ¼" return.

**CABINET:** Heavy gauge stainless steel. All welded construction.

**WASTE CONTAINER:** 22-gauge stainless steel. All welded construction. Secured to cabinet with tumbler lock keyed like other Bradley units.

LINER: (Optional) Heavy-duty stitched vinyl-coated nylon.

## Capacity

18 gal. (2.5 cu. ft.)

## **Operation**

Receptacle removable for servicing by unlocking waste container.

#### Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 15-5/8"W x 29-1/8"H x 4"D. Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

## **Guide Specification**

Recessed waste receptacle shall be fabricated of heavy gauge stainless steel with seamless exposed surfaces in satin finish. Removable 18-gallon stainless steel waste receptacle. Heavy-duty vinyl liner is optional. Receptacle secured to cabinet with tumbler lock.

Overall dimensions: 17-1/8" W x 30-5/8" H x 12-3/4" D.



# ADA Compliant


- Consult local and national accessibility codes for proper installation quidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.

## **Optional Features**

|                           | Feature |
|---------------------------|---------|
| Vinyl Liner Part #P11-001 |         |

Orders composed of products indicated as **BradEX®** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.



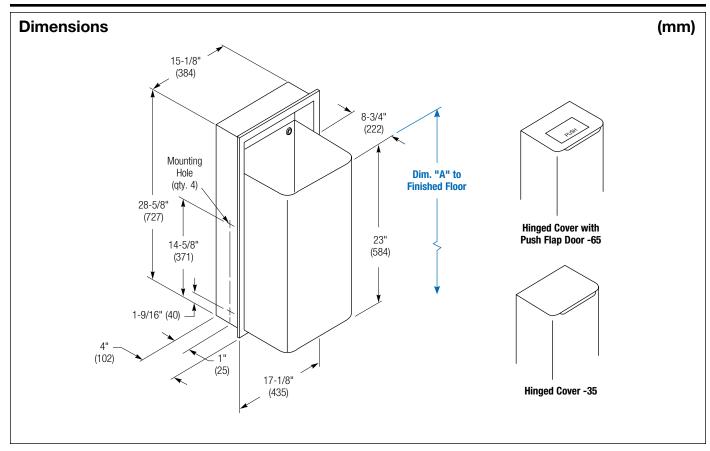

| Dim. "A" Key Surface:                      | For Dim. "A"                                       | Top of Rough Wall Opening | Bottom of Rough Wall Opening |
|--|--|---------------------------|------------------------------|
| Waste receptacle top lip to finished floor | 36" (914)  | 41¾" (1060)               | 125/8" (321)                 |
|  | 32" (813)  | 37¾" (959)                | 85⁄8" (219)                  |
|  | 28" (711)  | 33¾" (857)                | 45⁄8" (117)                  |
| Rough wall opening:                        |  |                           |                              |
| Surface Mount:                             | No rough opening, see overall dimensions           |                           |                              |
| Recessed:                                  | 15%" (397) Wide x 291%" (740) High x 4" (102) Deep |                           |                              |
| Semi-Recessed:                             | 15%" (397) Wide x 291/6" (740) High x 2" (51) Deep |                           |                              |

Orders composed of products indicated as **BradeX®** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 2 of 2 6/3/2024 This information is subject to change without notice. Bradley\_WasteReceptacle\_334\_10\_11 View Latest Version

© 2024 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com