

Model 5922 — Recessed **Bradex**® Model 5922-10 — Semi-Recessed (recesses 31/4", projects 11/4") Model 5922-11 — Surface-Mounted (projects 41/2")

Models 5922-10 and 5922-11 do not allow clearance for optional grab bar.

Product Materials

CABINET: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with burr-free edges.

FLANGE: 22 gauge stainless steel with exposed surfaces in architectural satin finish. One-piece seamless construction, 1" wide with ¼" return.

DOOR: 18 gauge stainless steel with full-length piano hinge and tumbler lock keyed like other Bradley units.

SPINDLES: polyethylene, non-removable by user.

Capacity

Toilet Seat Cover Dispensers — 1,000 standard single-fold or half-fold toilet seat covers; Toilet Tissue Dispensers — two standard core toilet tissue rolls through 5¼" in diameter.

Operation

Hinged access door permits servicing of components from one side. Door to be at 90 degrees for access to tissue spindle.

Installation

Verify all rough-in dimensions prior to installation. Requires rough wall opening 15%"W x 28%"H x 41/4"D. Secure to framing with mounting screws (included) at holes provided. Recessed unit allows clearance for grab bar (not included) across front of unit. Semi-recessed and surface-mounted units utilize one piece door; does not allow clearance for grab bar. 5900 Series Combination Units are to be installed so that doors open 90° to fill product and maintain waste container.

Guide Specification

Recessed combination unit shall include toilet seat cover dispenser and toilet tissue dispenser, and be fabricated of stainless steel with seamless exposed surfaces in satin finish. Door and back panel shall be 18 gauge. Door shall have piano hinge and tumbler lock.

Overall dimensions: 171/8"W x 305/8"H x 41/2"D.



Product Compliance


• ICC ANSI A117.1, Citation 609.3



- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of
- ADA requires a 1½" grab bar clearance to the wall. When fully recessed, this unit protrudes ¼" from the finished wall. A standard grab bar, when mounted over the unit, will not meet the ADA requirement of 1½".

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.



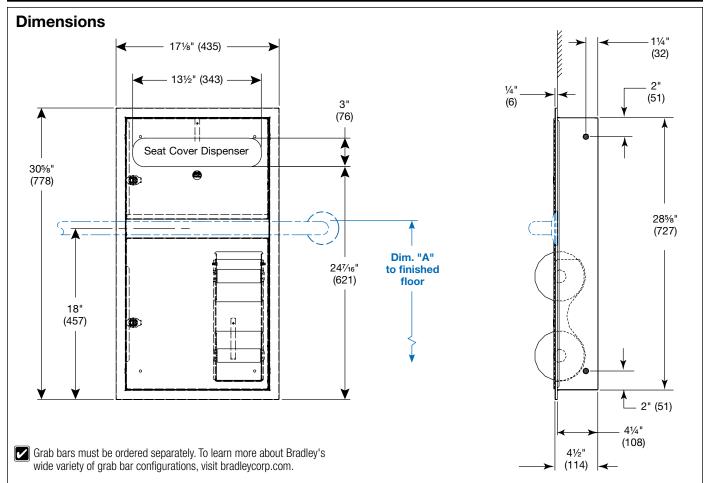

Combination Unit - Seat Cover Dispenser/Dual Roll Tissue Dispenser

				*	
Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening	For Seat Cover Opening Top	For Bottom Toilet Paper Opening Lower Lip @ Dim. "A"
Top of 1½" grab bar to finished floor	36" (914)	47" (1194)	181⁄8" (460)	45%" (1153)	175/16" (440)
	34½" (876)	45½" (1156)	16%" (422)	437/8" (1114)	1513/16" (402)
	33" (838)	44" (1118)	151⁄8" (384)	42%" (1076)	145/16" (364)
Rough wall opening:					
Surface-Mount:	No rough opening, overall dimensions 15%" (391) Wide x 28%" (734) High x 4½" (114) Deep				
Recessed:	15%" (391) Wide x 28%" (734) High x 4¼" (108) Deep				
Semi-Recessed:	15%" (391) Wide x 28%" (734) High x 3¼" (83) Deep				

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 2 of 2 8/16/2024 This information is subject to change without notice. Bradley_CombiDispenser_5922_10_11

View Latest Version

© 2024 Bradley P.O. Box 309, Menomonee Falls, WI 53052-0309 800 BRADLEY (800 272 3539) +1 262 251 6000 bradleycorp.com