



A WATTS Brand

6437, 6437-73

Soap Dispenser

Model 6437 – Liquid Soap *Bradex*®

Model 6437-73 – Foam Soap *Bradex*®

- ☒ Recessed
- ☒ Contemporary Series — Satin Finish
- ☒ ADA Compliant

Product Materials

Cabinet: stainless steel.

Faceplate: 18 gauge stainless steel. Faceplate and soap vessel form one integral piece.

Soap Vessel Liner: molded high impact polystyrene.

Liquid Soap Valve: chrome-plated brass housing with ABS plastic mechanism. Requires less than 5 lbs. of force to dispense soap.

Foam Soap Valve: chrome-plated ABS mechanism. Requires less than 5 lbs. of force to dispense soap.

Capacity

50-oz. liquid or foam soap.

Operation

Soap dispenser slides open for filling and cleaning. Push-in valve dispenses measured amounts of vegetable or coconut oil liquid soaps, synthetic detergents, antiseptic solutions or foam soap with less than 5 lbs. of force. Sight gauge indicates refill time. Door secured with tumbler lock.

- ☒ Bradley liquid soap valves operate best with any vegetable oil or coconut oil hand soap having a 10–15% soap concentration.
- ☒ Bradley foam soap valves work with majority of bulk foam soap.

Installation

Verify all rough-in dimensions prior to installation. Requires rough wall opening 8-3/4"W x 4-1/2"H x 4"D. Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

Guide Specification

Recessed soap dispenser shall be fabricated of stainless steel with exposed surfaces in satin finish. Faceplate of 18 gauge stainless steel and secured by tumbler lock. Capacity: 50-oz. liquid or foam soap.

Overall dimensions: 10-1/4"W x 6"H x 4-1/16"D.


ADA Compliant

- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.

Service Kits

Liquid Soap Valve - P15-408

Foam Soap Valve - P15-510

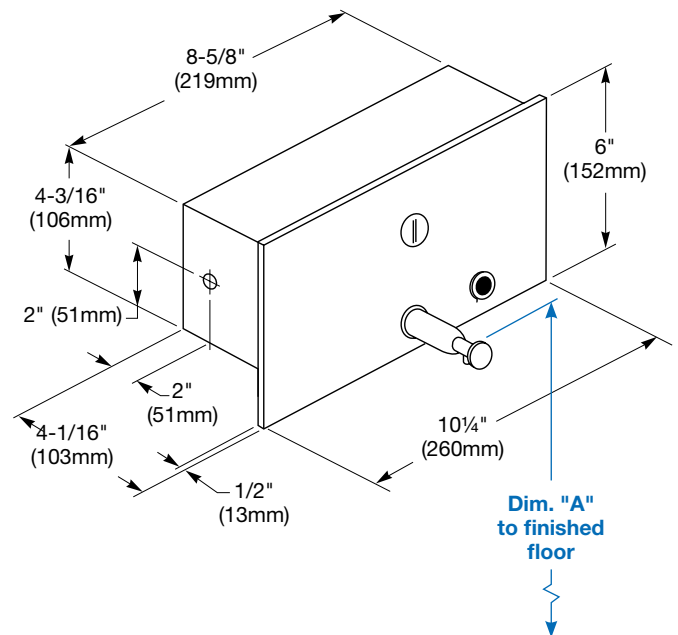

| Dim. "A" Key Surface: | For Dim. "A" | Top of Rough Wall Opening | Bottom of Rough Wall Opening |
|---|--------------|---------------------------|------------------------------|
| Push button top to finished floor | 40" (1016mm) | 43-3/16" (1097mm) | 38-11/16" (983mm) |
| | 38" (965mm) | 41-3/16" (1046mm) | 36-11/16" (932mm) |
| | 36" (914mm) | 39-3/16" (995mm) | 34-11/16" (881mm) |
| | 34" (864mm) | 37-3/16" (945mm) | 32-11/16" (830mm) |
| Rough wall opening: | | | |
| Recessed: 8-3/4" (222mm) Wide x 4 1/2" (115mm) High x 4" (102mm) Deep | | | |