

Frequency frameless mirror with clip fasteners and 1/4" plate glass with polished edges:

**Product Materials**

**MIRROR:** first quality 1/4" float glass and thermosetting infrared-cured paint backing. Manufactured in accordance with ASTM C 1036 and ASTM C 1503. Edges ground and polished smooth.

**Design Option Codes**

Code	Description
-B	Bead blasted wave (for 30" and 60" models)
-H	High (left side)
-L	Low (left side)

**Glass Option Codes**

0 = 1/4" plate glass mirror w/polished edges

**Installation**

Verify all rough-in dimensions prior to installation. Secure mounting clips (metal) to wall with screws included, then engage mirror into clips.

**Guide Specification**

Frameless mirror shall be of first quality 1/4" float glass, guaranteed for 15 years against silver spoilage. Edges ground and polished smooth.

**Frameless Mirror shall be Bradley Model 747W.**



**ADA Compliant**

- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.


**Models**

Width (Inches)	Height (Inches)	Glass Option	Design Option	Standard Model Number
30"	36"	0	B	747W-030360B
30"	36"	0	H	747W-030360H
30"	34"	0	L	747W-030360L
60"	36"	0	B	747W-060360B
60"	36"	0	H	747W-060360H
60"	36"	0	L	747W-060360L
90"	36"	0	H	747W-090360H
90"	36"	0	L	747W-090360L

DISCONTINUED

**Washroom Accessories  
Document No. 8737**

**Dimensions**

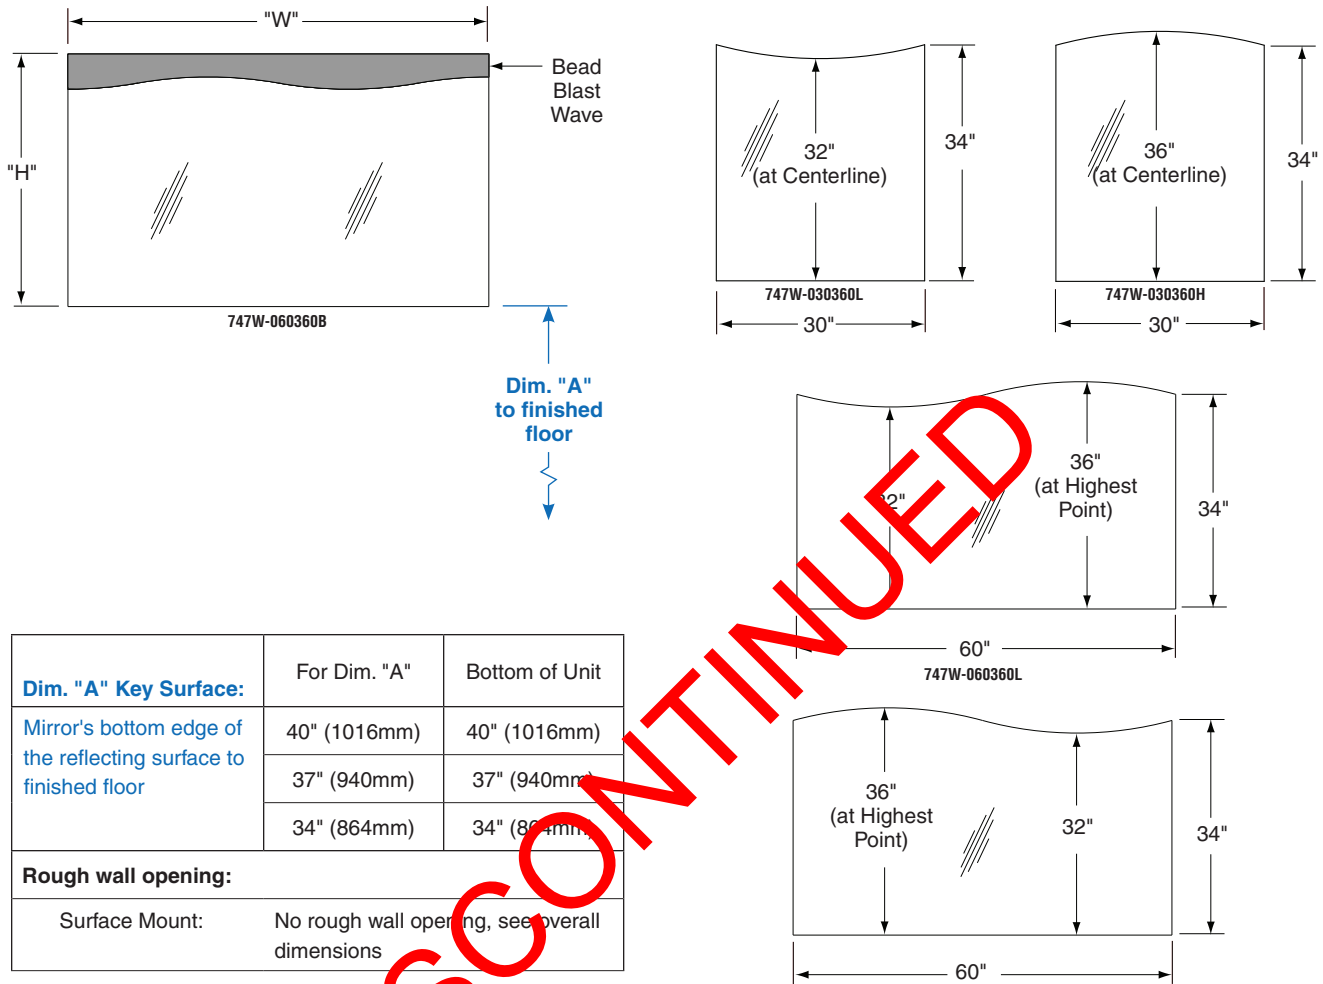

Dim. "A" Key Surface:	For Dim. "A"	Bottom of Unit
Mirror's bottom edge of the reflecting surface to finished floor	40" (1016mm)	40" (1016mm)
	37" (940mm)	37" (940mm)
	34" (864mm)	34" (864mm)
<b>Rough wall opening:</b>		
Surface Mount:	No rough wall opening, see overall dimensions	

DISCONTINUED