



A WATTS Brand

**Product Materials**

**MIRROR:** 20 gauge stainless steel, polished to No. 8 architectural bright finish. Stretcher leveled for uniformity. Very bright – excellent reflectivity, very slight polish grain. ¼" return conceals backing.

**BACKING:** Tempered Masonite bonded to mirror with adhesive.

- Stainless steel mirrors will differ in optic quality from glass mirrors.

**Installation**

Verify all rough-in dimensions prior to installation. Secure to wall with tamper-resistant mounting screws (included) at holes provided. Provide in-wall backing at mounting screw locations.

**Guide Specification**


Mirror shall be fabricated of 20 gauge stainless steel with No. 8 architectural finish. Unit shall have ¼" return to conceal ¼" tempered Masonite backing bonded to mirror with adhesive. If either the width or height exceed 24", an additional mounting hole will be added on each side.

**ADA Compliant**

- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.

**Models** (Must select one)

<b>Model 748-016240</b>	16" x 24" Mirror
<b>Model 748-018240</b>	18" x 24" Mirror
<b>Model 748-018300</b>	18" x 30" Mirror
<b>Model 748-018360</b>	18" x 36" Mirror
<b>Model 748-024360</b>	24" x 36" Mirror

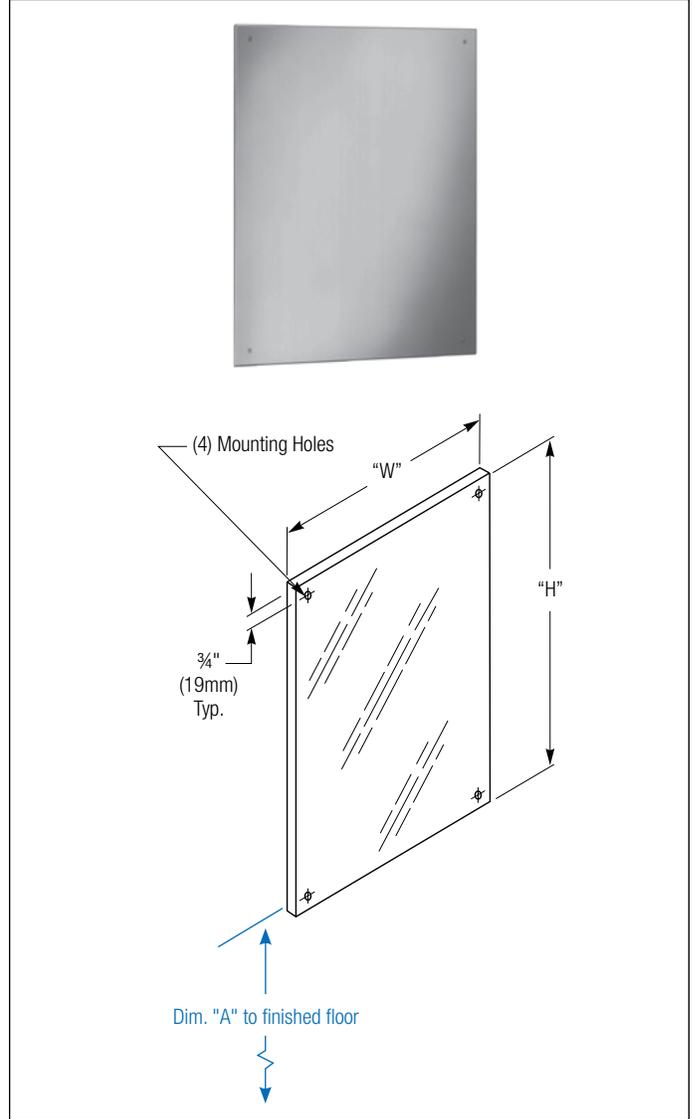

Dim. "A" Key Surface:	For Dim. "A"	Bottom of Unit
Mirror's bottom edge of the reflecting surface to finished floor	40" (1016mm)	40" (1016mm)
	37" (940mm)	37" (940mm)
	34" (864mm)	34" (864mm)
<b>Rough wall opening:</b>		
Surface Mount:	No rough wall opening, see overall dimensions	