



A WATTS Brand

7805

Angle-Frame Mirror Shelf

Product Materials

FRAME: One-piece, roll-formed stainless steel, 3/4" x 3/4" angle with corners welded, ground and polished smooth to a satin finish. Double strength continuous integral stiffener on all sides for added strength. Bevel on front of angle secures frame flush against mirror.

BACK: Galvanized steel, secured to frame with concealed screws, equipped with integral horizontal hanging brackets.

MIRROR: First quality 1/4" float glass, thermosetting infrared-cured paint backing with Poly-Glaze protective finish. Manufactured in accordance with ASTM C 1036 and ASTM C 1503. All edges protected by shock-absorbing, neoprene tubing. The back of the mirror is protected by a sheet of 1/4" extruded polystyrene, which is placed between the mirror and the galvanized steel.

SHELF: 18 gauge stainless steel with exposed surfaces in architectural satin finish. Flanged front and side, welded to frame.

Installation


Verify all rough-in dimensions prior to installation. Secure concealed mounting bracket to wall with screws (not included) at holes provided. Mounting kits available through Bradley (ref. #899-026). Refer to technical data sheet #8880. Provide in-wall backing at mounting screw locations. Position mirror over mounting bracket to engage hanger tabs. Slide mirror down and lock into position.

Guide Specification

Mirror shall be framed with heavy gauge, one-piece, roll-formed, 3/4" x 3/4" stainless steel angle with double strength continuous integral stiffener. Welded corners shall be polished to a uniform satin finish. Integral 18 gauge stainless steel shelf shall have front and side flanges. Mirror shall be of first quality 1/4" float glass guaranteed for 15 years against silver spoilage and protected by a shock-absorbing, neoprene tubing with Poly-Glaze protective finish. Back of unit shall be galvanized steel secured to frame with concealed screws, equipped with integral horizontal hanging brackets and separate wall hanger for concealed mounting.

ADA Compliant

- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.

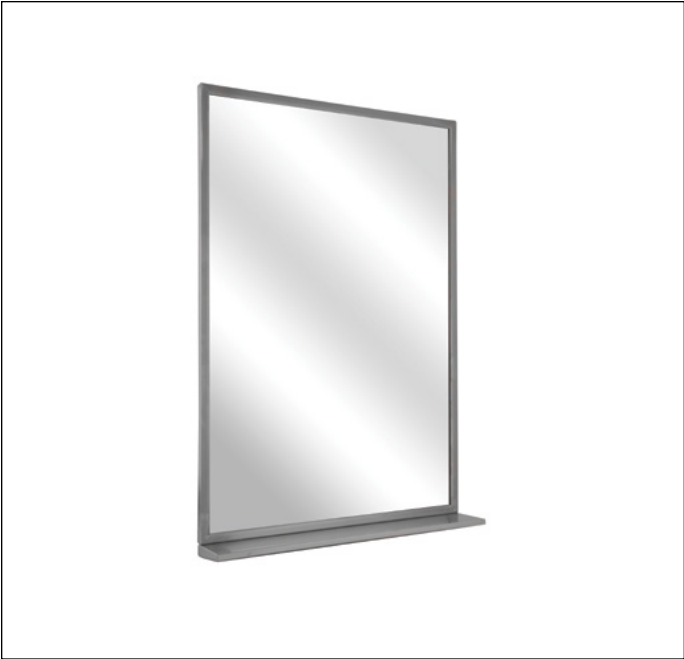

Models (Must select one)

Model 7805-016360	16" x 36" Mirror
Model 7805-018240	18" x 24" Mirror
Model 7805-018300	18" x 30" Mirror
Model 7805-018360	18" x 36" Mirror BradEX®
Model 7805-024300	24" x 30" Mirror
Model 7805-024360	24" x 36" Mirror BradEX®

Optional Features

Features	Suffix
1/4" tempered glass mirror in lieu of polished float glass mirror ¹	-2

¹ Optional feature is only available for select styles: 18" x 30", 18" x 36" and 24" x 36".

- ☒ An inherent characteristic of a manufacturing process for tempered glass is distortion which may vary from mirror to mirror.
- ☒ Bradley mirrors are not field interchangeable from horizontal to vertical or vice versa. Always specify width first.

Orders composed of products indicated as **BradEX®** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.




A WATTS Brand

7805

Angle-Frame Mirror Shelf

Dimensions

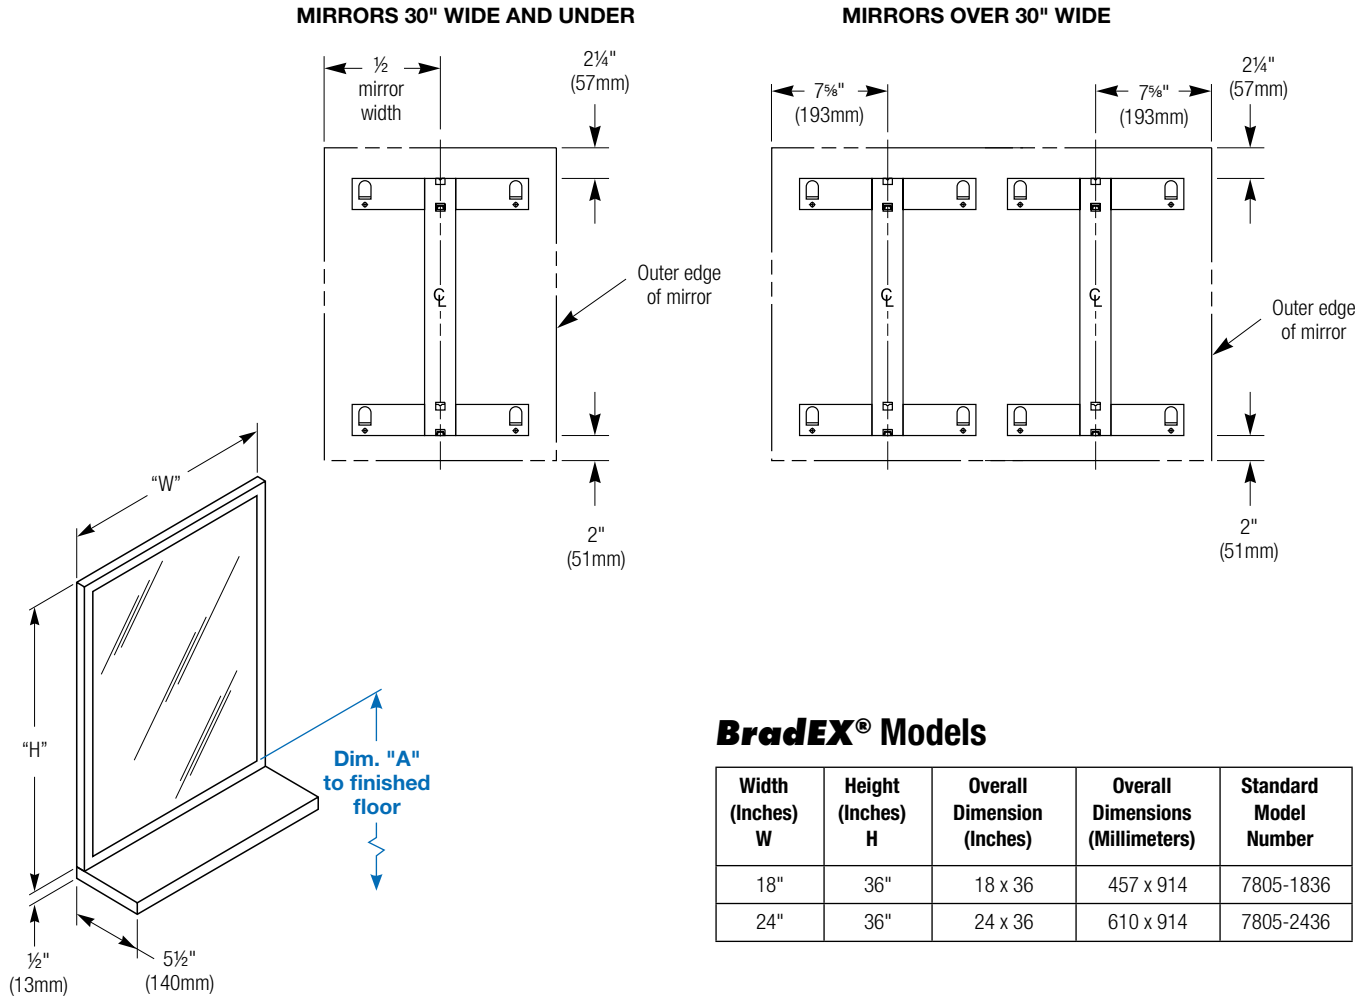

Dim. "A" Key Surface:	For Dim. "A"	Bottom of Unit
Mirror's bottom edge of the reflecting surface to finished floor	40" (1016mm)	38 3/4" (984mm)
	37" (940mm)	35 3/4" (908mm)
	34" (864mm)	32 3/4" (832mm)
Rough wall opening:		
Surface Mount:	No rough wall opening, see overall dimensions	

Orders composed of products indicated as **BradEX®** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.