



A WATTS Brand

### Product Materials

**FRAME:** One-piece roll-formed stainless steel, 3/4" x 3/4" angle with corners welded, ground and polished smooth to a satin finish. Double strength continuous integral stiffeners on all sides for added strength. Bevel on front of angle secures frame flush against mirror. Two 1/4" barrel butt hinges welded to bottom of frame.

**BACK:** Galvanized steel, secured to frame with concealed screws.

**MIRROR:** First quality 1/4" float glass, thermosetting infrared-cured paint backing with Poly-Glaze protective finish. Manufactured in accordance with ASTM C 1036 and ASTM C 1503. The back of the mirror is protected by a sheet of 1/4" extruded polystyrene, which is placed between the mirror and the galvanized steel.

**SUPPORT BRACKETS:** Heavy gauge stainless steel, electro-polished. Self-locking brackets securely riveted to frame.

### Installation

Verify all rough-in dimensions prior to installation. Secure lower hinges to wall with screws (included) at holes provided. Provide in-wall backing at mounting screw locations. Mount top brackets to permit full arm extension.

### Guide Specification

Adjustable tilt mirror shall be framed with heavy gauge, one-piece roll-formed 3/4" x 3/4" stainless steel angle with double strength continuous integral stiffeners. Welded corners shall be polished to a uniform satin finish. Mirror shall be of first quality 1/4" float glass guaranteed for 15 years against silver spoilage and protected by a shock-absorbing, waterproof filler with Poly-Glaze protective finish. Self-locking adjustable support brackets shall be polished stainless steel and riveted to frame.

### ADA Compliant

- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.



Models (Must select one)	
Model 782-016240	16" x 24" Mirror
Model 782-016300	16" x 30" Mirror
Model 782-018240	18" x 24" Mirror
Model 782-018360	18" x 36" Mirror
Model 782-024360	24" x 36" Mirror




A WATTS Brand

782

## Adjustable Tilt Mirror

### Dimensions

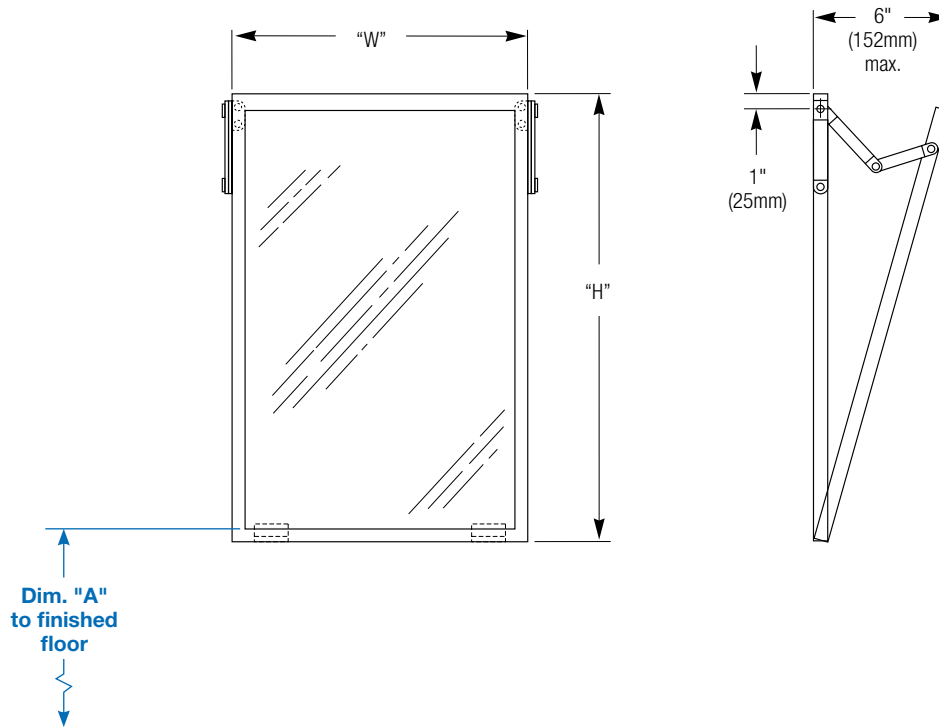

Dim. "A" Key Surface:	For Dim. "A"	Bottom of Unit
Mirror's bottom edge of the reflecting surface to finished floor	40" (1016mm)	39¼" (997mm)
	37" (940mm)	36¼" (921mm)
	34" (864mm)	33¼" (845mm)
<b>Rough wall opening:</b>		
Surface Mount:	No rough wall opening, see overall dimensions	