

Simultaneous Operation Frost-Proof Drench Shower and Eye/Face Wash Fixture

Model S19-310HFP

- Complies with American National Standard Z358.1-2004
- Galvanized Steel Protected with BRADTECT™ Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty

Specifications

This unit is made specifically for areas subject to freezing. Drench shower and eyewash unit fit easily into any work environment. Shower valve and eyewash valve operate quickly by a large, highly visible push handle. Safe, steady water flow under varying water supply conditions from 30-90 PSI is assured by integral flow control in the sprayhead assembly.

UPC and cUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

Construction

Impact-resistant plastic shower head is colored bright yellow for high visibility in emergency situations. Galvanized steel piping is additionally protected with BRADTECT™ safety yellow coating.

Standard Equipment

Shower Head

10" (254mm) diameter yellow impact-resistant plastic

Eye/Face Wash Sprayhead

Twin perforated disc eye/face wash heads with protective pop-off sprayhead covers, operated by a stainless steel push flag handle. Safe, steady water flow under varying water supply conditions is assured by flow control for 30-90 PSI.

Frost-Proof Shower and Eyewash Valve— Simultaneous Operation

1" IPS stay-open valve. Hand operated by a large, highly visible stainless steel push handle.

Pipe and Fittings

Galvanized steel protected with BRADTECT™ safety yellow coating. Standard depth is 36" (914mm). Special order for other bury depths. (18"-48"-60"-72") NOTE: Special order depths are non-returnable.

Water Supply


1-1/4" IPS.



Recommended Option:

Navigator S19-2100 EFX25
Emergency Thermostatic Mixing Valve

NAVIGATOR



Satisfies ANSI Z358.1-2004
tepid water requirements.

Document No. 4570

This information is subject to change without formal notice.
© 2006 Bradley Corporation
10-11-2006 (2 Pages Total)

Bradley 

P.O. Box 309, Menomonee Falls, WI 53052-0309
Phone 1-800-BRADLEY FAX 262-251-5817
Web Site: <http://www.bradleycorp.com>




SEI CERTIFIED
MODEL
Z358.1-2004

**PLUMBING FIXTURES
TECHNICAL DATA**

Simultaneous Operation Frost-Proof Drench Shower and Eye/Face Wash Fixture Model S19-310HFP

MODEL	
Model No.	Description
<input type="checkbox"/> S19-310HFP	Simultaneous Operation Frost-Proof Drench Shower and Eye/Face Wash Fixture
<input type="checkbox"/> S19-2100	Navigator EFX25 – Emergency Thermostatic Mixing Valve

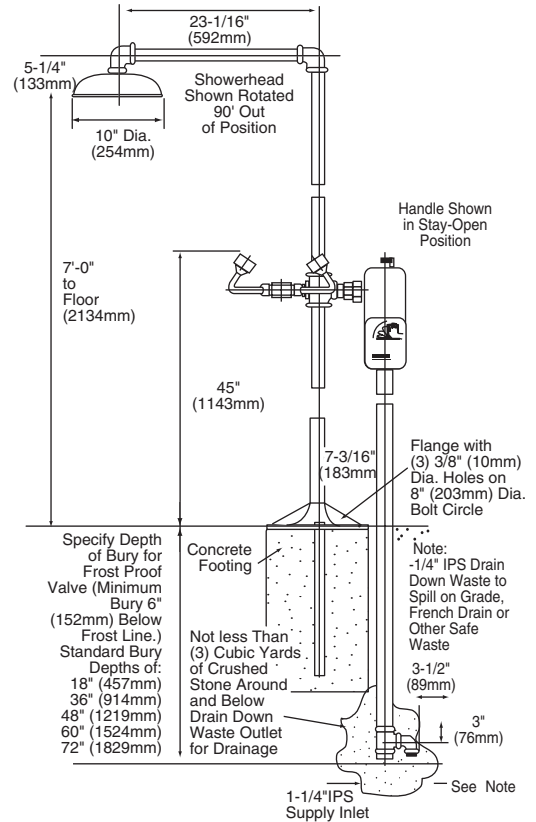

Document No. 4570

This information is subject to change without formal notice.
© 2006 Bradley Corporation
10-11-2006 (2 Pages Total)



P.O. Box 309, Menomonee Falls, WI 53052-0309
Phone 1-800-BRADLEY FAX 262-251-5817
Web Site: <http://www.bradleycorp.com>