

- Specify Color \_\_\_\_\_ (see color chart in back of catalog)
- Recessed
- Accent Series — Color Laminate
- ADA Compliant

## Product Materials

**CABINET:** stainless steel.

**FACEPLATE:** 5/16" thick solid laminate, made of colored Melamine bonded under high pressure to a phenolic core. All exposed edges are machined smooth to a uniform dark finish. Faceplate and soap vessel form one integral piece. Tumbler lock keyed like other Bradley units.

**SOAP VESSEL:** 22 gauge stainless steel with exposed surfaces in architectural satin finish.

**SOAP VESSEL LINER:** molded high impact polystyrene.

**SOAP VALVE:** chrome-plated brass with ABS mechanism. Requires less than 5 lbs. of force to dispense soap.

## Capacity

32-oz. liquid soap.

## Operation

Soap dispenser slides open for filling and cleaning. Sight gauge indicates refill time. Valve dispenses measured amount of liquid soap. Requires less than 5 lbs. of force to dispense soap.

- Bradley liquid soap valves operate best with any vegetable oil or coconut oil hand soap having a 10–15% soap concentration.


## Installation

Verify all rough-in dimensions prior to installation. Requires rough wall opening 8½"W x 4½"H x 4"D. Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

## Guide Specification

Recessed liquid soap dispenser shall be fabricated of stainless steel with exposed surfaces in satin finish. Faceplate of 5/16" thick solid laminate and secured by tumbler lock. Requires less than 5 lbs. of force to dispense soap. Capacity: 32-oz. liquid soap.

**Overall dimensions: 10¼"W x 6¼"H x 4"D.**

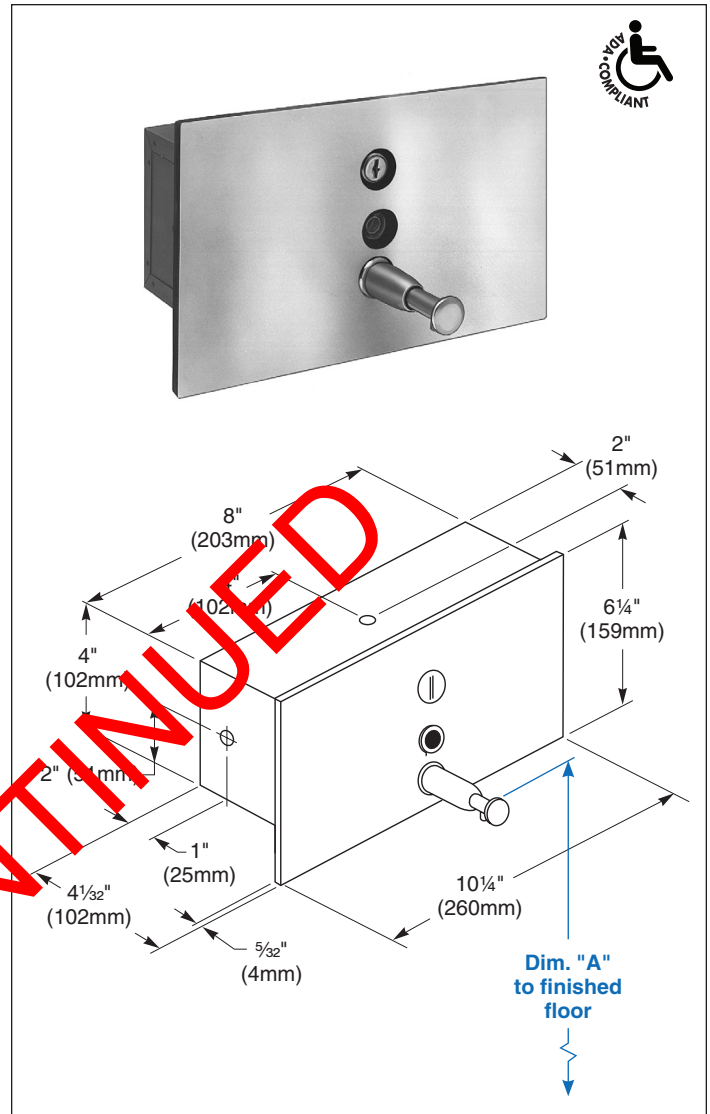

## ADA Compliant

- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.

**Washroom Accessories**  
**Document No. 8655**

<b>Dim. "A" Key Surface:</b>	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening
<b>Push button top to finished floor</b>	40" (1016mm)	43" (1092mm)	38½" (978mm)
	38" (965mm)	41" (1041mm)	36½" (927mm)
	36" (914mm)	39" (991mm)	34½" (876mm)
	34" (864mm)	37" (940mm)	32½" (826mm)
<b>Rough wall opening:</b>			
Recessed:	8½" (216mm) Wide x 4½" (115mm) High x 4" (102mm) Deep		