

# Shower Accessories


## Compression-Type Valves

### Single-Temperature Compression Valve

(suffix SV)

This valve offers no temperature selection to the bather. Hot and cold water is blended at a master mixing valve and tempered water is piped to the shower valves. Single-temperature systems are less expensive to install and maintain than adjustable-temperature systems. However, since most adults and athletes like to select their own shower temperature, good planning for group shower rooms dictates the inclusion of some stations with adjustable temperature. Single-temperature compression valves for tempered water systems are available on all Bradley showers.

Single-temperature compression valve. Available with lever handle for ADA application (suffix SVL).

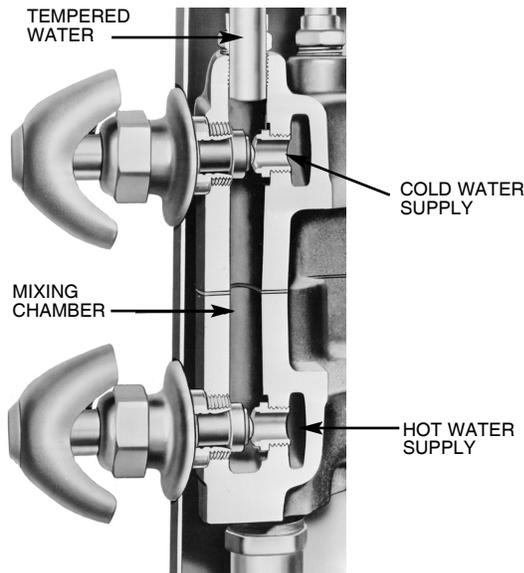


The hot supply to these valves should always be tempered by a master controller, either at a remote location or mounted in the shower equipment.

### Two-Handle Compression Valve


(suffix HC)

Hot and cold compression valve features heavy-duty construction and manual volume/temperature selection to the individual bather. The valve handles are solid stainless steel, have a swept back design and are mated to the 5/8" diameter valve stem by a fluted arrangement which provides a long-lasting attachment. The shutoff washer rests in a Celcon swivel which prevents grinding against the renewable bronze seat. A nylon insert in the washer retaining screw prevents the washer from loosening or falling out. Colored index buttons indicate water service. Handles and index buttons are secured with vandal-resistant Allen head screws. All parts are chrome plated or stainless steel.

#### Hot and Cold Compression Valve with/without Stops (1C-HC-IS/1C-HC)

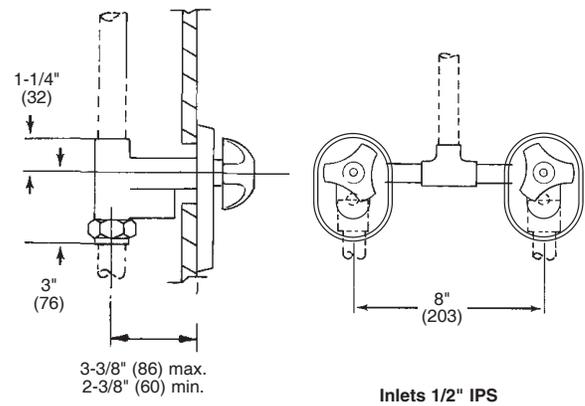

#### Single Compression Valve with/without Stops (1C-SV-IS/1C-SV)

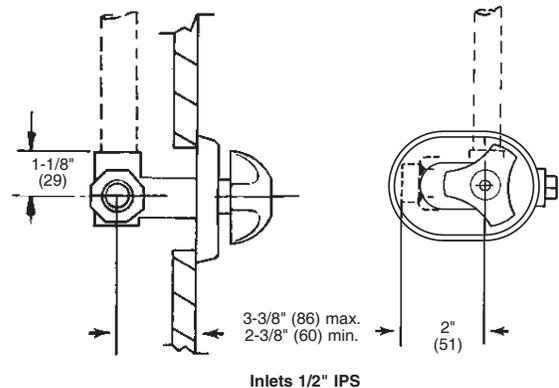

Document No. 5400

This information is subject to change without formal notice.  
© 2005 Bradley Corporation  
10-11-2005 (1 Page Total)



P.O. Box 309, Menomonee Falls, WI 53052-0309  
Phone 1-800-BRADLEY FAX 262-251-5817  
<http://www.bradleycorp.com>